

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

202574US3PCT

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/763235

INTERNATIONAL APPLICATION NO.

PCT/JP00/03967

INTERNATIONAL FILING DATE

16 JUNE 2000

PRIORITY DATE CLAIMED

17 JUNE 1999

TITLE OF INVENTION

Yohichi NEMUGAKI, et al.

APPLICANT(S) FOR DO/EO/US

AIR-COOLING/TEMPERING DEVICE AND AIR-COOLING/TEMPERING METHOD FOR A GLASS PLATE

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Request for Consideration of Documents Cited in International Search Report

Notice of Priority

PCT/IB/304

PCT/IB/308

Drawings (11 sheets)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR) <div style="font-size: 2em; font-weight: bold; margin-top: 5px;">097763235</div>		INTERNATIONAL APPLICATION NO. <div style="font-weight: bold; margin-top: 5px;">PCT/JP0043967</div>		ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold; margin-top: 5px;">202574US3PCT</div>	
---	--	---	--	---	--

21. The following fees are submitted:. BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <div style="margin-top: 5px;"> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,000.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 </div> <div style="text-align: right; margin-top: 5px;"> ENTER APPROPRIATE BASIC FEE AMOUNT = </div>				CALCULATIONS PTO USE ONLY	
				<div style="display: flex; justify-content: space-between;"> \$860.00 </div>	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				<div style="display: flex; justify-content: space-between;"> \$0.00 </div>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	13 - 20 =	0	x \$18.00	\$0.00	
Independent claims	3 - 3 =	0	x \$80.00	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$860.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				\$0.00	
SUBTOTAL =				\$860.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				<div style="display: flex; justify-content: space-between;"> \$0.00 + </div>	
TOTAL NATIONAL FEE =				\$860.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$860.00	
				Amount to be:	\$
				refunded	\$
				charged	\$

☒ A check in the amount of **\$860.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
 A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **15-0030** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

22850

Surinder Sachar
Registration No. 34,423

SIGNATURE

C. Irvin McClelland
 NAME

21,124
 REGISTRATION NUMBER

Feb. 20 2001
 DATE

202574US

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF :
YOICHI NEMUGAKI ET AL : ATTN: APPLICATION DIVISION
SERIAL NO: NEW U.S. PCT APPLN :
(Based on PCT/JP00/03967)
FILED: HEREWITH :
FOR: AIR-COOLING/TEMPERING :
DEVICE AND AIR-COOLING/
TEMPERING METHOD FOR A
GLASS PLATE

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified
application as follows:

IN THE CLAIMS

Claim 5, line 2, delete "2, 3 or 4,".

Please add new claims 11-13 as follows:

--11. The air-cooling/tempering device for a glass plate according to Claim 2,
wherein at an upstream side of the air-cooling/tempering device, there is located a glass plate
bend-shaping apparatus for bend-shaping a glass plate to have a predetermined curvature,
which comprises a heating furnace for heating the glass plate to a bend-shaping temperature,
a roller conveyor provided at a downstream side of the heating furnace and having a plurality
of shaping rollers for forming a transferring plane for transferring the glass plate, vertically

moving means for moving in a vertical direction the plurality of shaping rollers and a control means for controlling the driving means so that by the plurality of rollers at the position where the glass plate is transferred, a desired curved plane curved in the transferring direction of the glass plate is formed in at least a portion of the transferring plane and the plurality of rollers are sequentially moved vertically with the transfer of the glass plate whereby the curved plane is shifted in the transferring direction of the glass plate.

12. The air-cooling/tempering device for a glass plate according to Claim 3, wherein at an upstream side of the air-cooling/tempering device, there is located a glass plate bend-shaping apparatus for bend-shaping a glass plate to have a predetermined curvature, which comprises a heating furnace for heating the glass plate to a bend-shaping temperature, a roller conveyor provided at a downstream side of the heating furnace and having a plurality of shaping rollers for forming a transferring plane for transferring the glass plate, vertically moving means for moving in a vertical direction the plurality of shaping rollers and a control means for controlling the driving means so that by the plurality of rollers at the position where the glass plate is transferred, a desired curved plane curved in the transferring direction of the glass plate is formed in at least a portion of the transferring plane and the plurality of rollers are sequentially moved vertically with the transfer of the glass plate whereby the curved plane is shifted in the transferring direction of the glass plate.

13. The air-cooling/tempering device for a glass plate according to Claim 4, wherein at an upstream side of the air-cooling/tempering device, there is located a glass plate bend-shaping apparatus for bend-shaping a glass plate to have a predetermined curvature, which comprises a heating furnace for heating the glass plate to a bend-shaping temperature, a roller conveyor provided at a downstream side of the heating furnace and having a plurality of shaping rollers for forming a transferring plane for transferring the glass plate, vertically

moving means for moving in a vertical direction the plurality of shaping rollers and a control means for controlling the driving means so that by the plurality of rollers at the position where the glass plate is transferred, a desired curved plane curved in the transferring direction of the glass plate is formed in at least a portion of the transferring plane and the plurality of rollers are sequentially moved vertically with the transfer of the glass plate whereby the curved plane is shifted in the transferring direction of the glass plate.--

REMARKS

Favorable consideration of this application, as presently amended, is respectfully requested.

By the present preliminary amendment the multiple dependency of claim 5 has been cancelled. Further, the subject matter of the cancelled multiple dependencies is now set forth in new dependent claims 11-13.

The present application is believed to be in condition for a full and thorough examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Gregory J. Maier
Attorney of Record
Registration No. 25,599
Surinder Sachar
Registration No. 34,423



22850

(703) 413-3000
Fax No.: (703) 413-2220
GJM:SNS\la
I:\atty\SNS\202574-pr.wpd

DESCRIPTIONAIR-COOLING/TEMPERING DEVICE AND AIR-COOLING/TEMPERING
METHOD FOR A GLASS PLATETECHNICAL FIELD

5 The present invention relates to an air-cooling/tempering device and an air-cooling/tempering method for a glass plate used for transporting machines such as automobiles, ships, railways, airplanes and so on or other various usage such as buildings and so on.

10 BACKGROUND ART

 There has been known a method for bend-shaping a glass plate by transferring a glass plate heated to around a softening temperature in a heating furnace on a roller conveyor comprising a plurality of curved rollers
15 (in, for example, U.S.P. 4,123,246). According to this method, the softened glass plate falls by its own weight, so that the glass plate is bent to meet the curvature of the rollers. In this case, the glass plate is bend-shaped in a direction perpendicular to a transferring
20 direction of the glass plate.

 In description, "bend-shaping in a direction perpendicular to a transferring direction" means that the shape of a bend-shaped glass plate is a shape curved around the axis of the transferring direction. In other
25 words, the bend-shaped glass plate has a curved shape in cross section taken vertically along the axis of the transferring direction. "Bend-shaping along a

- transferring direction" means similarly that the shape of a bend-shaped glass plate is a shape curved around the axis perpendicular to the transferring direction. In other words, the bend-shaped glass plate has a curved shape in cross section taken vertically along the axis perpendicular to the transferring direction. With respect to the shape of a curved plane formed by a plurality of rollers as described hereinbelow, "curved in (along) a transferring direction", "curved in a transferring direction" or the like have the same meaning as "bend-shaped in (along) a transferring direction". Also, in description of the curved plane concerning a direction perpendicular to a transferring direction, the same meaning as "bend-shaped in a direction perpendicular to a transferring direction" should be taken.

In this description, "perpendicular to a certain direction" means a direction perpendicular to a certain direction on a horizontal plane. Further, "upper" or "lower" in this description means "upper" or "lower" with respect to a horizontal plane.

In automobile industries in recent years, a demand of production of small quantity and large variety has been increasing, and glass plates having various curvatures are needed so as to correspond to models of automobiles. In a method described in U.S.P. 4,123,246 (hereinbelow, referred to simply as the '246 method), it was necessary to exchange rollers to those having a

* curvature corresponding to a model of automobile. The exchanging took much time, and it was necessary to prepare rollers having a curvature required for the model.

Further, in the '246 method, glass plates are
5 transferred in a direction perpendicular to a direction to be bent. In this case, in bend-shaping a glass plate for a side window of an automobile for instance, the direction of a side of the glass plate when it is fitted to an automobile, corresponds to the direction of
10 extending of the rollers. Accordingly, a stripe-like roller strain due to the contact of the rollers to the glass plate is formed in a vertical direction in a state of being assembled, and therefore, the stripe-like strain by the rollers is apt to be conspicuous. With respect to
15 this, detailed description will be made hereinbelow.

When a glass plate is transferred by means of rollers, a so-called roller strain is formed by the contact of the glass plate with the rollers. Each of the rollers is extended in a direction perpendicular to the
20 transferring direction, and they are arranged adjacently in the transferring direction. Therefore, the roller strain is formed in a stripe form in a direction perpendicular to the transferring direction of the glass plate.

25 Usually, it is difficult to find the roller strain by human eyes, and the roller strain is never an obstacle to visibility in use. However, it is seldom to find the

roller strain depending on a condition of use and light incident to the glass plate. For example, a stripe-like strain extending in a vertical direction of a glass plate in a state that the glass plate is assembled to an automobile is easy to see in comparison with a stripe-like strain extending in a horizontal direction in an assembled state. Accordingly, it is preferred to make the transferring direction of the glass plate to be bend-shaped coincident with a horizontal direction in an assembled state.

On the other hand, when a glass plate is bend-shaped along the transferring direction, the thickness in apparent of the glass plate viewed from the frontage of an air-cooling/tempering device becomes large. Accordingly, in a conventional air-cooling/tempering device for a glass plate, a large frontage is required. When the frontage is made large, the distance between the air-blowing ports of the air-cooling/tempering device and the surface of the glass plate is large whereby the cooling performance is reduced.

As a bend-shaping method for a glass plate wherein the transferring direction of the glass plate to be bend-shaped is made coincident with the horizontal direction in an assembled state, and the frontage for introducing glass plates in the air-cooling/tempering device is made small, the method as described in U.S.P. 4,820,327 is known. According to this method, a glass plate is bend-

shaped by heating the glass plate to around a softening temperature in a heating furnace and transferring the glass plate by means of a plurality of rollers arranged with an inclination in the transferring direction so as to curve the transferring path. In this method (hereinbelow, referred to as the '327 method), since the softened glass falls by its own weight, the glass plate is bent to meet a curvature of the transferring path. In this case, the glass plate is bend-shaped in the transferring direction.

In the '327 method, however, it was necessary to change the arrangement of rollers so as to form a transferring path having a curvature which meets a specified model among various models. The exchange took much time. Further, in the '327 method, the transferring direction of the glass plate is changed to a vertical direction. Therefore, the entire equipment used for the '327 method is inevitably large. Further, the transferring direction of the glass plate has to be changed from the vertical direction to the horizontal direction whereby a complicated mechanism is needed.

The glass plate bend-shaped as described above is, then, transferred to the air-cooling/tempering device in which air-cooling and tempering are effected. In this case also, the glass plate is air-cooled and tempered while it is transferred by a roller conveyor. Namely, the glass plate is transferred by the roller conveyor,

wherein in such transferring process, the glass plate is air-cooled and tempered by blowing air to its upper and lower faces through air-blowing heads arranged upper and lower sides of the roller conveyor. In this case, the air-cooling/tempering device is preferably so adapted that the blowing of air is started when the entirety of the glass plate has completely been transferred between the upper and lower air-blowing heads so that the entire surface of the glass plate can uniformly be air-cooled and tempered. Namely, the air-cooling/tempering device is formed such that the blowing of air is started when the entirety of the glass plate is transferred between the upper and lower air-blowing heads, and the blowing of air is stopped when the glass plate is completely passed through the air-blowing heads. Then, the blowing of air is started again when the next glass plate to be air-cooled and tempered is, in its entirety, completely transferred between the upper and lower air-blowing heads.

However, the conventional method has a weak point such that in air-cooling and tempering the glass plate, another glass plate to be subsequently air-cooled and tempered can not be transferred between the upper and lower air-blowing heads until the glass plate subjected at present to air-cooling and tempering is completely passed between the upper and lower air-blowing heads, whereby, certain intervals of time is necessary for transferring. As a result, there was a drawback that

glass plates can not effectively be air-cooled and tempered.

The present invention has been made in consideration of the above-mentioned, and the object of the present invention is to provide an air-cooling/tempering device for a glass plate, which can provide uniform cooling performance.

Further, it is an object to provide an air-cooling/tempering method for a glass plate, which can effectively air-cool and temper glass plates.

DISCLOSURE OF THE INVENTION

According to an aspect of the present invention, there is provided an air-cooling/tempering device for a glass plate which comprises a plurality of rollers for transferring a bend-shaped glass plate and for curving a transferring plane so as to correspond to a curved shape of the glass plate by being moved vertically; a plurality of upper air-blowing heads each disposed at an upper side between each adjacent rollers to blow air to an upper face of the glass plate transferred by the plurality of rollers; a plurality of lower air-blowing heads each disposed at a lower side between each adjacent rollers to blow air to a lower face of the glass plate transferred by the plurality of rollers; and an air-blowing head moving mechanism for moving vertically the upper air-blowing heads and the lower air-blowing heads depending on a vertical position of the plurality of rollers in a

state that the distance between an upper air-blowing head and the lower air-blowing head opposing the upper air-blowing head is kept to be constant.

According to this, the upper air-blowing heads and
5 the lower air-blowing heads are moved vertically in response to the vertical movement of the rollers, whereby uniform cooling performance can be provided.

Further, according to an aspect of the present invention, there is provided an air-cooling/tempering
10 device for a glass plate which comprises a plurality of rollers disposed at predetermined intervals and supported by movable frames capable of moving vertically so as to move individually in a vertical direction to transfer a bend-shaped glass plate; upper air-blowing heads each
15 disposed at an upper side between each adjacent rollers to blow air to an upper face of the glass plate; lower air-blowing heads each disposed at a lower side between each adjacent rollers to blow air to a lower face of the glass plate; a plurality of upper supporting frames
20 attached with the upper air-blowing heads and supported to be capable of sliding in a vertical direction; a plurality of lower supporting frames attached with the lower air-blowing heads and supported to be capable of sliding in a vertical direction; pivot shafts each
25 provided on each of the movable frames; disk-like pieces each provided on the same axis as the pivot shaft; swing arms each disposed between adjacent pivot shafts so that

an end is supported rotatably by a pivot shaft at one side and the other end is supported by the pivot shaft at the other side; connecting arms each having an end connected to one of the lower supporting frames and the end connected to a central portion of one of the swing arms; and driven arms each having an end connected to one of the upper supporting frames and the other end mounted on an upper face of a central portion of one of the swing arms, wherein the plurality of rollers at a position where the glass plate is transferred are moved vertically with the transfer of the glass plate so that a curved plane is formed in the transferring plane formed by the plurality of rollers at that position, the curved plane being curved in a transferring direction so as to correspond to the shape of the glass plate bend-shaped; each of the rollers are sequentially moved vertically with the transfer of the glass plate and the curved plane is shifted in the transferring direction of the glass plate with the transfer of the glass plate; and the upper air-blowing heads and the lower air-blowing heads each disposed between each adjacent rollers are moved vertically so as to correspond to the vertical movement of the glass plate to transfer the bend-shaped glass plate and at the same time, to blow air to the upper and lower faces of the glass plate to thereby air-cooling and tempering the glass plate.

According to this, the upper air-blowing heads and

the lower air-blowing heads are moved vertically in response to the vertical movement of the rollers. Namely, the vertical movement of the rollers causes the vertical movement of the pieces by the same quantity of movement as the rollers. When these pieces are moved vertically, there occurs a difference of height between adjacent pieces whereby the swing arms are inclined. The lower air-blowing heads are connected to the arms via the connecting arms with the result that the upper air-blowing heads are moved vertically in connection with the swing motion of the swing arms. In this case, since the connecting arms are placed at a central portion of the swing arms, the quantity of movement of the upper air-blowing heads is $1/2$ as much as the difference of height between adjacent rollers. Further, the upper air-blowing heads are connected to the arms via the driven arms with the result that the upper air-blowing heads are moved vertically in connection with the swing motion of the swing arms. In this case, since the connecting arms are placed at a central portion of the swing arms, the amount of movement of the upper air-blowing heads is $1/2$ as much as the difference of height between adjacent rollers. Accordingly, the upper air-blowing heads and the lower air-blowing heads are moved vertically in response to the vertical movement of the rollers, and their positions are kept to be an intermediate level between the adjacent rollers. With this, uniform cooling performance can be

provided.

Further, according to an aspect of the present invention, there is provided an air-cooling/tempering method for a glass plate for air-cooling and tempering the glass plate by blowing air to an upper face and a lower face of the glass plate transferred sequentially by means of a transferring means through air-blowing heads disposed along the transferring means, which comprises using the air-blowing heads in which the air-blowing area is divided into a plurality of areas along a transferring direction of the transferring means; a step of stopping the blowing of air in the air-blowing area at an uppermost stream side in the transferring direction from the beginning of the transfer of a portion of the glass plate into the air-blowing area at the uppermost stream side in the transferring direction in the air-blowing head to the transfer of the entirety of the glass plate; a step of blowing air in the air-blowing area at the uppermost stream side in the transferring direction from the transfer of the entirety of the glass plate into the air-blowing area at the uppermost stream side in the transferring direction to the transfer of the glass plate to a downstream side of the air-blowing area at the uppermost stream side in the transferring direction; and a step of stopping the blowing of air in the air-blowing area at the uppermost stream side in the transferring direction after the entirety of the glass plate has been

transferred from the air-blowing area at the uppermost stream side in the transferring direction.

Further, according to an aspect of the present invention, there is provided an air-cooling/tempering method for a glass plate for air-cooling and tempering the glass plate by blowing air to an upper face and a lower face of the glass plate transferred sequentially by means of a transferring means through air-blowing heads disposed along the transferring means, wherein the air-blowing head has an air-blowing area which is divided into a first area at an upper stream side in the transferring direction of the transferring means and a second area at a downstream side thereof, and wherein a step of blowing air in the first and second areas when the entirety of the glass plate is transferred into the first area, a step of stopping the blowing of air in the first area when the entirety of the glass plate is passed through the first area, and a step of reopening the blowing of air in the first area when the next glass plate is transferred into the first area to which the blowing of air has been stopped, are repeated sequentially.

According to this, when the entirety of the glass plate transferred by means of the transferring means is transferred into the first area, air is blown into the first area and the second area. When the entirety of the glass plate is passed through the first area, the blowing

of air in the first area is stopped, and another glass plate to be subsequently air-cooled and tempered is transferred into the first area to which the blowing of air is stopped. Accordingly, time intervals for transferring glass plates can be shortened whereby the glass plates can effectively be air-cooled and tempered.

Further, according to an aspect of the present invention, there is provided an air-cooling/tempering method for a glass plate for air-cooling and tempering the glass plate by blowing air to an upper face and a lower face of the glass plate transferred sequentially by means of a transferring means through air-blowing heads disposed along the transferring means wherein the air-blowing head has an air-blowing area which is divided into a plurality of areas along the transferring direction of the transferring means, and wherein a step of blowing air from all divided areas when the entirety of the glass plate is transferred into the air-blowing area of the air-blowing head, a step of stopping the blowing of air in the order of areas through which the glass plate is passed, a step of reopening the blowing of air from the all divided areas when the entirety of the next glass plate is transferred into the areas to which the blowing of air is stopped, and a step of stopping the blowing of air in the order of areas through which the glass plate is passed, are repeated sequentially.

According to this, when the entirety of the glass

plate transferred by the transferring means is transferred between the upper and lower air-blowing heads, air is blown from all the areas. Then, with the transfer of the glass plate, the blowing of air is sequentially
5 stopped in the order of areas through which the glass plate is passed, and another glass plate to be subsequently air-cooled and tempered is transferred to the areas to which the blowing of air is stopped. Accordingly, time intervals for transferring glass plates
10 can be shortened, and the glass plates can effectively be air-cooled and tempered.

Further, according to an aspect of the present invention, there is provided an air-cooling/tempering method for a glass plate for air-cooling and tempering
15 the glass plate by blowing air to an upper face and a lower face of the glass plate transferred sequentially by means of a transferring means through air-blowing heads disposed along the transferring means, wherein the air-blowing area of the air-blowing heads is divided into a
20 plurality of areas along the transferring direction of the transferring means, and air is blown from only the air-blowing area of the area which corresponds to the position of the glass plate during the transfer when the entirety of the glass plate is transferred into the air-
25 blowing area of the air-blowing head.

According to this, when the entirety of the glass plate transferred by the transferring means is

transferred into the air-blowing area of the air-blowing head, air is blown from only the air-blowing head of the area corresponding to the position of the glass plate during the transfer. With this, time intervals for transferring glass plates can be shortened, and the glass plates can effectively be air-cooled and tempered.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view showing the construction of a glass plate bend-shaping line in which the air-cooling/tempering device of the present invention is assembled.

Figure 2 is a transition diagram showing operations of bending a glass plate by means of roller conveyors.

Figure 3 is a diagram showing the constructions of a roller rotating/driving means and a vertical direction driving means.

Figure 4 is a front view showing the entire construction of the air-cooling/tempering device.

Figure 5 is a front view showing the construction of an important portion of the air-cooling/tempering device.

Figure 6 is a side view showing the construction of an important portion of the air-cooling/tempering device.

Figure 7 is a transition diagram for explaining the function of the air-cooling/tempering device.

Figure 8 is a side view showing the construction of an important portion of the air-cooling/tempering device.

Figure 9 is a diagram of the function of the air-

cooling/tempering method for a glass plate according to a first embodiment of the present invention.

Figure 10 is a diagram of the function of the air-cooling/tempering method for a glass plate according to a
5 second embodiment of the present invention.

Figure 11 is a diagram of the function of the air-cooling/tempering method for a glass plate according to a third embodiment of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

10 Preferred embodiments of the air-cooling/tempering device and the air-cooling/tempering method for a glass plate according to the present invention will be described in detail with reference to the attached drawings.

15 Figure 1 is a perspective view showing the construction of a glass plate bend-shaping line in which the air-cooling/tempering device of the present invention is assembled. With reference to Figure 1, description will be made as to a general flow in bend-shaping
20 processes for a glass plate.

A glass plate 18 before being bend-shaped is transferred into a heating furnace 12 by means of a transferring roller conveyor (not shown) after the position for transfer has been determined at an inlet
25 port of the heating furnace 12. Then, it is heated to a predetermined bend-shaping temperature (about 600-700°C) while it is transferred in the heating furnace 12.

The glass plate 18 heated to the predetermined bend-shaping temperature is placed on a bend-shaping roller conveyor 20 and is transferred into a shaping zone 14. In the process of the transfer in the shaping zone 14, a predetermined bend-shaping operation is conducted by the bend-shaping roller conveyor 20.

Subsequently, the glass plate 18 subjected to the predetermined bend-shaping operation is moved onto an air-cooling/tempering roller conveyor 22. Then, by the air-cooling/tempering roller conveyor 22, the glass plate is transferred into an air-cooling/tempering device 16 in which air-cooling and tempering are effected.

The air-cooled and tempered glass plate 18 is moved onto a delivering roller conveyor 28 and is transferred to an inspection device (not shown) as the next step.

As described above, the glass plate is bend-shaped to have a predetermined curvature in the shaping zone 14, and then, is air-cooled and tempered in the air-cooling/tempering device 16.

Next, the construction of the shaping zone 14 will be described. First, the construction of the bend-shaping roller conveyor 20 disposed in the shaping zone 14 will be described with reference to Figures 1 and 2.

The bend-shaping roller conveyor 20 comprises a plurality of rollers 20A, 20B, ... having a straightened form, and each of the rollers 20A, 20B, ... is arranged horizontally in parallel to a transferring direction with

predetermined intervals therebetween. With the rotation of these rollers 20A, 20B, ..., the glass plate 18 is transferred on a transferring plane formed by these rollers 20A, 20B, Each of the rollers 20A, 20B, ... constituting the roller conveyor 20 is rotated independent from each other by means of a rotating/driving means, and at the same time, it is moved in a vertical direction independently by means of a vertical direction driving means.

10 In the following, each construction of the rotating/driving means and the vertical direction driving means will be described. The rotating/driving means and the vertical direction driving means for each roller 20A, 20B, ... have the same construction. Accordingly, the constructions of the rotating/driving means and the vertical direction driving means for only the roller 20A will be explained for convenience, and description of the constructions for other rollers 20B, 20C, ... is omitted.

First, the construction of the rotating/driving means will be described. As shown in Figure 3, the roller 20A has both ends supported rotatably by bearings 32, 32 disposed on a vertically movable frame 30 so as to be rotatable. A driven gear 34 is fixed to an end (a left end in Figure 3) of the roller 20A, and the driven gear 34 is meshed with a driving gear 36. The driving gear 36 is attached to a spindle 40 of a servomotor 38 mounted on the vertically movable frame 30. The roller

20A is rotated at a predetermined angular speed by driving the servomotor 38. The construction of the rotating/driving means is as above.

Next, the construction of the vertical direction driving means will be described. As shown in Figure 3, the vertically movable frame 30 is supported by a fixed frame 42 so as to be capable of sliding vertically. Namely, guide rails 44, 44 are arranged along a vertical direction at both sides of the vertically movable frame 30, and the guide rails 44, 44 are engaged with guide blocks 46, 46 fixed to the fixed frame 42. The vertically movable frame 30 is provided at both lower end portions with racks 48, 48 projecting toward a lower side. The racks 48, 48 are meshed with pinions 50, 50 which are fixed to a rotating shaft 52. The rotating shaft 52 has both ends supported by bearings 54, 54, and a spindle 58 of a servomotor 56 is connected to an end of it (a left end in Figure 3). The rotating shaft 52 is rotated by driving the servomotor 56 so that a rotating motion of the shaft is changed to a linear motion by the function of the pinions 50 and the racks 48. As a result, the vertically movable frame 30 is moved in a vertical direction. With the vertical movement of the vertically movable frame 30, the roller 20A is moved vertically. The construction of the vertical direction driving means is as above.

In Figure 3, reference numerals 60, 62 designate

heaters disposed in the shaping zone 14.

The above-mentioned rotating/driving means and the vertical direction driving means are provided for all other rollers 20B, 20C, Further, the servomotors 38, 56 of these driving means are controlled by a motion controller.

When the motion controller receives information of a model for the glass plate 18 from an external input means, it produces angular speed controlling data and vertical movement controlling data on the rollers 20A, 20B, ... so as to correspond to the curvature of the glass plate 18 of that model. Then, the controller controls the servomotors 38, based on the angular speed controlling data and controls the servomotors 56 based on the vertical movement control data. Namely, the motion controller performs multiple axis control for each of the rollers 20A, 20B, ... so that the glass plate 18 is bend-shaped to have a predetermined curvature in the transferring direction while the glass plate is transferred by the rollers 20A, 20B,

Bend-shaping operations for the glass plate 18 by the roller conveyor 20 constructed as described above will be described by using Figure 2. Characters in brackets in description correspond to the characters in the brackets of Figure 2.

In an initial state, all the rollers 20A, 20B, ... are at the highest position (A).

When the transfer of the glass plate 18 is started, rollers 20D-20F are descended (B) whereby a transferring plane formed by the rollers 20D-20F is changed into a gently curved shape having a large radius of curvature.

- 5 The glass plate 18 deflects along the curved plane due to its own weight while it is passed on the rollers 20D-20F whereby the glass plate is bend-shaped along the transferring direction.

- When the glass plate 18 is further transferred,
10 rollers 20F-20H are descended further than the former rollers 20D-20F (C). Thus, the transferring plane formed by the rollers 20F-20H is deformed into a curved shape having a smaller radius of curvature than the former curved plane. The glass plate further deflects along the
15 curved plane of the rollers 20F-20H due to its own weight while it is passed on the rollers 20F-20H, whereby it is bend-shaped along the transferring direction.

- When the glass plate 18 is further transferred, rollers 20H-20J are descended further than the former
20 roller 20F-20H (D) whereby the transferring plane formed by the rollers 20H-20J is deformed into a curved shape having smaller radius of curvature than the former curved plane. The glass plate 18 deflects further along the curved plane of the rollers 20H-20J due to its own weight
25 during being passed through the rollers 20H-20J, whereby the glass plate is bend-shaped along the transferring direction.

When the glass plate 18 is further transferred, rollers 20J-20L are descended further than the former rollers 20H-20J (E). Then, the transferring plane formed by the rollers 20J-20L is deformed into a curved plane
5 having the same radius of curvature as the finally obtainable curvature of the glass plate 18. The glass plate 18 is bend-shaped to be the finally obtainable curvature along the transferring direction while it is passed on the rollers 20J-20L. The subsequent rollers
10 20M, ... are moved vertically so as to maintain the curved plane having such curvature.

Thus, the roller conveyor 20 is operated so that the radius of curvature of the curved plane formed by the vertical movement of the rollers 20A, 20B, ... is
15 gradually reduced so that the glass plate 18 is bend-shaped along the transferring direction.

The construction of the air-cooling/tempering device 16 will be described. The air-cooling/tempering device 16 cools and tempers the glass plate 18 by blowing air to
20 an upper face and a lower face of the glass plate 18 transferred by the air-cooling/tempering roller conveyor 22. The air-cooling/tempering roller conveyor 22 is so constructed as to be moved vertically in the same manner as the bend-shaping roller conveyor 20. With reference
25 to Figure 4-6, the construction of the roller conveyor 22 will be described.

The roller conveyor 22 is constituted by arranging a

plurality of straight rollers 22A, 22B, ... in parallel at predetermined intervals in the transferring direction horizontally. And, each of the rollers 22A, 22B, ... is rotated independent from each other by rotating/driving means and at the same time, is moved vertically independent from each other by means of vertical direction driving means.

In the following, the construction of the rotating/driving means and the vertical direction driving means will be described. The construction of the rotating/driving means or the vertical direction driving means for each of the rollers 22A, 22B, ... have the same structure. Accordingly, description of only the structure of the rotating/driving means and the vertical direction driving means for the roller 20A is made for convenience, and description of the structures for other rollers 22B, 22C is omitted.

First, the construction of the rotating/driving means will be described. As shown in Figure 4, the roller 22A has both ends supported rotatably by bearings 72A, 72A arranged on a pair of vertically movable frames 70A, 70A. The spindle of a servomotor 78A is connected to an end (a right end in Figure 4) of the roller 22A. The roller 22A is rotated at a predetermined angular speed by driving the servomotor 78A. The construction of the rotating/driving means is as above.

Next, the construction of the vertical direction

driving means will be described. The pair of vertically movable frames 70A, 70A are supported respectively by a pair of fixed frames 82A, 82A so as to be movable vertically. Namely, guide rails 84A are arranged along a vertical direction at outer side portions of each of the vertically movable frames 70A, and the guide rails 84A are supported by guide blocks 86A, 86A fixed to inside portions of the fixed frames 82A so as to be capable of sliding. Racks 88A, 88A are arranged in outer side portions of the vertically movable frames 70A, and pinions 90A, 90A are meshed with the racks 88A, 88A. The pinions 90A, 90A are fixed to a rotating shaft 92A which has both ends supported pivotally by bearings 94A, 94A. The spindle of a servomotor 96A disposed at the top of one of the fixed frames 82A is connected to an end (a right end in Figure 4) of the rotating shaft 92A. The rotating shaft 92A is rotated by driving the servomotor 96A so that a rotating motion of it is changed to a linear motion by the function of the pinions 90A and the racks 88A. As a result, the vertically movable frames 70A are moved in a vertical direction. With the vertical movement of the vertically movable frames 70A, the roller 22A is moved in a vertical direction. The construction of the vertical direction driving means is as above.

25 The above-mentioned rotating/driving means and the vertical direction driving means are provided for all other rollers 22B, 22C, Servomotors 78A, 78B,

96A, 96B, ... for these driving means are controlled by a motion controller.

When the motion controller receives information of a model for the glass plate 18 from an external input means, it prepares angular speed control data and vertical movement control data for the rollers 22A, 22B, ... so as to correspond to the curvature of the glass plate 18 of the model. Then, the servomotors 78A, 78B, ... are controlled based on the prepared angular speed control data, and the servomotors 96A, 96B, ... are controlled based on the vertical movement control data. Namely, the motion controller performs multiple axis control for each of the rollers 22A, 22B, ... so that the glass plate 18 bend-shaped in the shaping zone 14 is transferred while the formed shape is maintained.

Next, description will be made as to the construction of the air-cooling/tempering device 16. The air-cooling/tempering device 16 is provided with an upper air-blowing box 100 at an upper side and a lower air-blowing box 102 at a lower side, which interpose the roller conveyor 22 therebetween. The upper air-blowing box 100 and the lower air-blowing box 102 are respectively connected with ducts 104, 106, and a blower, although not shown, is connected to these ducts 104, 106. Accordingly, when the blower is driven, cooling air generated by the blower is supplied to the upper air-blowing box 100 and the lower air-blowing box 102 through

the ducts 104, 106.

The cooling air supplied to the upper air-blowing box 100 is blown to the roller conveyor 22 through nozzles 25A, 25B, ... of upper blowing heads (air blowing
5 heads at an upper side) 24A, 24B, ... arranged at an upper side of spaces between adjacent rollers 22A, 22B, On the other hand, the cooling air supplied to the lower air-blowing box 102 is blown to the roller conveyor 22 through nozzles 27A, 27B, ... of lower air-
10 blowing heads (air-blowing heads at a lower side) arranged at a lower side of spaces between adjacent rollers 22A, 22B, With such, the upper face and the lower face of the glass plate 18 transferred by the roller conveyor 22 are cooled.

15 The upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... are arranged respectively so as to be moved vertically. Further, the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... are respectively moved
20 vertically in connection with the rollers 22A, 22B, The rollers 22A, 22B, ... are moved vertically with the transfer of the glass plate 18. In this case, among the rollers 22A, 22B, ..., the rollers located at the position where the glass plate 18 is transferred are
25 moved vertically so that a transferring plane formed by the rollers at that position has a curved plane in correspondence with the curved shape of the bend-shaped

glass plate in the transferring direction of the glass plate. With the transfer of the glass plate, each of the rollers are sequentially moved vertically so that the curved plane formed by the rollers is shifted to the transferring direction of the glass plate.

In the following, description will be made as to a mechanism which causes a vertical movement of the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B,

As shown in Figure 4, the upper air-blowing head 24A is arranged along the roller 22A. The upper air-blowing head 24A is held by a holder (an upper supporting frame) 108A. The holder 108A has an upper portion on which a pair of slide rods 110A, 110A are extended vertically, and the slide rods 110A, 110A are supported by bushes 114A, 114A provided in a slide frame 112 so as to be capable of sliding. Namely, the holder 108A is supported so as to be capable of sliding in a vertical direction with respect to the slide frame 112.

The slide frame 112 has both end portions to which guide blocks 116, 116 are firmly attached. The guide blocks 116, 116 are provided so as to slide on guide rails 120, 120 mounted on fixed frames 118, 118. Namely, the slide frame 112 is supported so as to be capable of sliding in a vertical direction with respect to the fixed frames 118, 118.

Racks 126, 126 of rack jacks (upper supporting frame

elevating means) 124, 124 are connected to an upper portion of the slide frame 112 by means of connecting bars 122, 122. By driving the rack jacks 124, 124, the slide frame 112 is moved in a vertical direction.

5 Stoppers 110a, 110a are fixed to the top of the slide rods 110A, 110A set up in the upper portion of the holder 108A. Accordingly, when the slide frame 112 is ascended, the stoppers 110a, 110a are pushed by the upper portion of the bushes 114A, 114A whereby the holder 108A
10 is pulled up. Accordingly, the upper air-blowing head 24A is pulled up upward by the holder 108A pulled up.

The inside of the upper air-blowing head 24A is partitioned into a plurality (6 in this embodiment) of spaces, and 6 air-introducing ports 128A, 128A, ...
15 formed in an upper face portion of the upper air-blowing head 24A are respectively communicated with the spaces. The 6 air-introducing ports 128A, 128A, ... are respectively connected to air-supplying ports 130A, 130A, ... formed in a lower face portion of the upper
20 air-blowing box 100 through flexible pipes 132A, 132A, These flexible pipes 132A, 132A, ... are formed flexibly so as to expand and shrink according to the vertical movement of the upper air-blowing head 24A. Accordingly, even when the upper air-blowing head 24A is
25 moved vertically, the upper air-blowing box 100 is not moved vertically.

As described above, the upper air-blowing head 24A

is supported so as to be capable of sliding in a vertical direction. Then, the upper air-blowing head 24A is pulled up by driving the rack jacks 124, 124.

On the other hand, the lower air-blowing head 26A is arranged along the roller 22A, and is held by a holder (a lower supporting frame) 138A. The holder 138A has both end portions to which rods of a pair of cylinders (lower supporting frame elevating means) 140A, 140A are connected. The cylinders 140A, 140A are respectively attached to connecting arms 142A, 142A, and the connecting arms 142A, 142A are capable of sliding on guide rails 144A, 144A disposed on inner side faces of vertically movable frames 70A, 70A via slide blocks 146A, 146A. Accordingly, with the vertical movement of the connecting arms 142A, 142A, the lower air-blowing head 26A is moved vertically in connection with the connecting arms 142A, 142A. The head is moved vertically according to the expansion or shrinkage of the rods of the cylinders 140A, 140A when they are driven.

The inside of the lower air-blowing head 26A is partitioned into a plurality (3 in this embodiment) of spaces, and 3 air-introducing ports 148A, 148A, 148A formed in a lower face portion of the lower air-blowing head 26A are respectively communicated with the spaces. The 3 air-introducing ports 148A, 148A, 148A are respectively connected to air-supplying ports 150A, 150A, 150A formed in an upper face portion of the lower air-

blowing box 102 through flexible pipes 152A, 152A, 152A. The flexible pipes 152A, 152A, 152A are formed flexibly so as to expand and shrink according to the vertical movement of the lower air-blowing head 26A. Accordingly, even when the lower air-blowing head 26A is moved vertically, the lower air-blowing box 102 is not moved vertically.

As described above, the upper air-blowing head 24A and the lower air-blowing head 26A are respectively supported so as to be capable of sliding in a vertical direction. Further, other upper air blowing heads 24B, 24C, ... and the lower air-blowing heads 26B, 26C, ... are also supported so as to be capable of sliding in a vertical direction. The upper air-blowing box 100, the lower air-blowing box 102 and the slide frame 112 are used commonly.

As shown in Figures 5 and 6, pivot shafts 154A, 154B, ... are respectively provided in the vicinity of an upper end portion of the vertically movable frames 70A, 70B, On these pivot shafts 154A, 154B, ..., disk-like pieces 156A, 156B, ... are supported on the same axial line so as to be rotatable.

Further, swing arms 158A, 158B, ... are disposed between adjacent pivot shafts 154A, 154B, ..., and an end of the swing arms 158A, 158B, ... is supported respectively by one of the adjacent pivot shafts 154A, 154B, ... so as to be rotatable. Each other end of them

is placed on the piece 156B, 156C, ... attached to the pivot shaft 154B, 154C, ... at the other side.

Each of the pivot shafts 154A, 154B, ... is provided on each of the vertically movable frames 70A, 70B,

5 Accordingly, each of the pivot shafts 154A, 154B, ... is moved vertically in connection with the vertical movement of each of the rollers 22A, 22B, ... which form the roller conveyor 22. When a height difference takes place between each adjacent pivot shafts 154A, 154B, ... by the
10 vertical movement of the pivot shafts 154A, 154B, ..., the swing arms 158A, 158B, ... are inclined in response to degrees of the height difference.

An upper end portion of the connecting arms 142A, 142B, ... to which the lower air-blowing heads 26A, 26B, ... are connected, is connected to a central portion
15 of the swing arms 158A, 158B, ... by means of pins 160A, 160B, ... respectively. Accordingly, by a swing movement of the swing arms 158A, 158B, ..., the connecting arms 142A, 142B, ... are moved vertically according to an
20 amount of inclination of the swing arms 158A, 158B, Then, the vertical movement of the connecting arms 142A, 142B, ... causes the vertical movement of the lower air-blowing heads 26A, 26B,

On the other hand, driven arms 162A, 162B, ... are
25 attached to both end portions of the holders 108A, 108B, ... by which the upper air-blowing heads 24A, 24B, ... are held (Figure 4). On the end portion of the

driven arms 162A, 162B, ..., rollers 164A, 164B, ... are respectively provided rotatably as shown in Figures 5 and 6. These rollers 164A, 164B, ... are positioned at a central portion of the swing arms 158A, 158B, ...

5 respectively. Accordingly, a swing motion of the swing arms 158A, 158B, ... causes a vertical movement of the driven arms 162A, 162B, ... according to an amount of inclination of the swing arms 158A, 158B, ... respectively. Then, the vertical movement of the driven
10 arms 162A, 162B, ... causes the vertical movement of the upper air-blowing heads 24A, 24B,

As described above, the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... are moved vertically in connection with the vertical
15 movement of each of the rollers 22A, 22B, ... which form the roller conveyor 22. The amount of movement of each roller is 1/2 of a difference in height of adjacent roller 22A, 22B, Namely, since the connecting arms 142A, 142B, ... and the driven arms 162A, 162B, ... are
20 respectively connected to an intermediate position of the swing arms 158A, 158B, ..., when a difference of height takes place between each adjacent rollers 22A, 22B, ..., they move by a distance of 1/2 of the difference in height. As a result, the upper air-blowing heads 24A,
25 24B, ... and the lower air-blowing heads 26A, 26B, ... are always kept to an intermediate level position between adjacent rollers 22A, 22B,

The function of the air-cooling/tempering device 16 having the above-mentioned construction in this embodiment is as follows.

First, initial setting is conducted. Namely, rack
5 jacks 124A, 124A are driven to descend the slide frame 112 to a predetermined operational position (the position shown in Figure 4). With this, each of the holders 108A, 108B, ... are supported to be movable vertically, and at the same time, the rollers 164A, 164B, ... of the driven
10 arms 162A, 162B, ... are respectively placed on the swing arms 158A, 158B, As a result, each of the upper air-blowing heads 24A, 24B, ... is moved vertically in connection with the swing motion of the swing arms 158A, 158B,

15 Further, the cylinders 140A, 140B, ... are simultaneously driven to ascend the lower air-blowing heads 26A, 26B, ... respectively so that each of the nozzles 27A, 27B, ... is positioned to a position of a predetermined distance apart from the transferring plane
20 of the roller conveyor 22.

After the above-mentioned initial setting has been finished, the bend-shaping of the glass plate 18 is started. Description concerning the bend-shaping method of the glass plate 18 in the shaping zone 14 has already
25 been made. Accordingly, only a process for air-cooling and tempering the bend-shaped glass plate 18 will be described with reference to Figure 7.

The glass plate 18 bend-shaped in the shaping zone 14 is transferred from the bend-shaping roller conveyor 20 to the air-cooling/tempering roller conveyor 22.

As shown in Figure 7(A), all the rollers 22A, 22B, ... constituting the roller conveyor 22 are located at the highest position in a state previous to the glass plate 18 being transferred thereon. Accordingly, the transferring plane is flat, and each of the upper air-blowing heads 24A, 24B, ... and lower air-blowing heads 26A, 26B, ... are positioned at the same height level.

When the glass plate 18 is transferred from the bend-shaping roller conveyor 20 to the air-cooling/tempering roller conveyor 22, and the glass plate 18 is entered into the air-cooling/tempering device 16, the blower (not shown) is driven so that cooling air is blown to the glass plate 18 through the nozzles 25A, 25B, ... of the upper air-blowing heads 24A, 24B, ... and the nozzles 27A, 27B, ... of the lower air-blowing heads 26A, 26B, Then, the glass plate 18 is air-cooled and tempered by the cooling air blown from the nozzles 25A, 25B, ... of the upper air-blowing heads 24A, 24B, ... and the nozzles 27A, 27B, ... of the lower air-blowing heads 26A, 26B,

In the roller conveyor 22 for transferring the glass plate 18, each of the rollers 22A, 22B, ... transfers the glass plate 18 while the rollers are moved vertically so as to maintain the shape of the bend-shaped glass plate

18 as shown in Figures 7(B)-(D).

On the other hand, with the vertical movement of the rollers 22A, 22B, ... transferring the glass plate 18, the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... which are arranged for the roller 22A, 22B, ... are moved vertically in connection with the vertical movement of the rollers. In this case, the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... are moved vertically so that they are always positioned at an intermediate level between each adjacent rollers 22A, 22B,

As described above, in the air-cooling/tempering device 16 of this embodiment, the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... are moved in connection with the vertical movement of the rollers 22A, 22B, ... of the roller conveyor 22. In this case, the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... are moved vertically so that they are always positioned at an intermediate level between adjacent rollers 22A, 22B, With such arrangement, the distance from the transferred glass plate 18 to the nozzles 25A, 25B, ..., 27A, 27B, ... of the blowing heads 24A, 24B, ..., 26A, 26B, ... can be kept to be substantially constant whereby uniform cooling performance can be provided.

Further, in the air-cooling/tempering device 16 of this embodiment, even when a trouble happens during the air-cooling/tempering of the glass plate 18, there is an advantage that the upper air-blowing heads 24A, 24B, ...
 5 and the lower air-blowing heads 26A, 26B, ... can quickly be retracted with respect to the transferring plane.

Namely, when a trouble happens during the air-cooling and tempering, for example, the rotation of the rollers 22A, 22B, ... of the roller conveyor 22 is
 10 stopped first. Then, the rack jacks 124, 124 are driven to raise the slide frame 112. By raising the slide frame 112, the stoppers 110a, 110a of the slide rods 110A, 110B, ... provided in each of the holders 108A, 108B, ... are pushed by the upper surface of the bushes 114A,
 15 114B, ... provided in the slide frame 112, whereby each of the holders 108A, 108B, ... are raised. By raising each of the holders 108A, 108B, ..., the upper air-blowing heads 24A, 24B, ... are raised simultaneously whereby they are retracted with respect to the
 20 transferring plane of the roller conveyor 22.

Further, at the same time of driving the rack jacks 124, 124, each of the cylinders 140A, 140B, ... are driven to shrink its rod, whereby each of the lower air-blowing heads 26A, 26B, ... is lowered so that the air-
 25 blowing heads are retracted with respect to the transferring plane of the roller conveyor 22.

Thus, according to the air-cooling/tempering device

16 of this embodiment, even when a trouble happens during the air-cooling and tempering of the glass plate 18, the upper air-blowing heads 24A, 24B, ... and the lower air-blowing heads 26A, 26B, ... can quickly be retracted with respect to the transferring plane, hence, the trouble can be coped with quickly.

Next, a preferred sequence in the air-cooling/tempering method of the present invention will be described. As shown in Figure 8, dampers 250A, 250B, ..., 252A, 252B, ... are respectively provided at air supplying ports 130A, 130B, ..., 150A, 150B, ... formed in air-blowing boxes 30, 32. The dampers 250A, 250B, ..., 252A, 252B, ... are controlled independently to be opened and closed by means of a controller (not shown) respectively. Air is supplied to each of the air-blowing heads 24A, 24B, ..., 26A, 26B, ... by opening the dampers 250A, 250B, ..., 252A, 252B, ..., and the supply of air is stopped by closing the dampers. Thus, the air blowing area of each of the air blowing heads 24A, 24B, ..., 26A, 26B, ... is divided.

The air-blowing heads 24A, 24B, ..., 26A, 26B, ... are arranged to be movable vertically, and they are moved vertically in connection with the movement of each of the rollers 22A, 22B, ... of the roller conveyor 22 by means of a link mechanism (not shown).

The air-cooling/tempering device 16 is constructed as described above. The first embodiment of the air-

cooling/tempering method of the present invention using such air-cooling/tempering device 16 is as follows. In the description of the construction of the device, Figure 8 shows the glass plate 18 wherein its curved shape is omitted. Accordingly, the air-cooling/tempering method is described by using Figure 9.

As described before, the air-cooling/tempering device 16 is so adapted as to divide the air blowing area by controlling the dampers 250A, 250B, ..., 252A, 252B, ... to be opened and closed by means of the controller. As shown specifically in Figure 9(A), the air blowing area is divided at an intermediate point of the roller conveyor 22 into the first area X at an upstream side and the second area Y at a downstream side, whereby air can selectively be blown in three ways: the first area X at an upstream side, the second area Y at a downstream side, and all the areas XY of the roller conveyor 22.

Figures 9(A)-9(F) show an air-cooling/tempering method in a time series of (A)→(F). Characters in brackets in the following description correspond to characters in brackets in Figure 9.

Each of the rollers 22A, 22B, ... of the roller conveyor 22 before the glass plate 18 is transferred thereon is located at the highest position (A).

When the bend-shaped glass plate 18 is transferred on the air-cooling/tempering roller conveyor 22, the air-

cooling/tempering roller conveyor 22 transfers the glass plate 18 into the air-cooling/tempering device 16 while the rollers 22A, 22B, ... are moved vertically so as to maintain the shape of the glass plate 18 (B). When the entirety of the glass plate 18 is transferred in the first area X, air is blown to the roller conveyor 22 through the air-blowing heads 24A-24J, 26A-26J of the whole areas XY (C). In the course that the glass plate 18 is passed through the upper and lower air-blowing heads 24A-24J, 26A-26J, air is blown to the upper and lower faces whereby the glass plate is air-cooled and tempered (D).

When the glass plate 18 transferred by the roller conveyor 22 is passed through the first area X as shown in Figure 9(E), the blowing of air through the air-blowing heads 24A-24E, 26A-26E belonging to the first area X is stopped. Then, in the course that the glass plate 18 is air-cooled and tempered in the second area Y, another glass plate 18A to be air-cooled and tempered next is transferred into the first area X. When the entirety of the glass plate 18A is transferred in the first area X, the blowing of air through the air-blowing heads 24A-24E, 26A-26E of the first area X is again started as shown in Figure 9(F) whereby the air-cooling and tempering of the glass plate 18A is started.

In the same manner as the above above, when the glass plate 18A is passed through the first area X, the

blowing of air through the air-blowing heads 24A-24E, 26A-26E belonging to the first area X is stopped. Then, another glass plate 18" to be air-cooled and tempered next is transferred into the first area X to which the
5 blowing of air is stopped.

Thus, by dividing the air blowing area into two portions in the transferring direction, the glass plate 18A to be air-cooled and tempered next can be transferred into the air-cooling/tempering device 16 while the air-
10 cooling and tempering of the glass plate 18 which has been transferred into the air-cooling/tempering device 16, can be conducted. With this, the interval of glass plates 18 transferred subsequently can be reduced whereby the glass plate 18 can effectively be air-cooled and
15 tempered.

Figure 10 is a diagram showing the function of a second embodiment of the air-cooling/tempering method of the present invention in which the above-mentioned air-cooling/tempering device 16 is used. In the description
20 on the function of the second embodiment, characters in brackets correspond to characters in brackets in Figure 10.

Each of the rollers 22A, 22B, ... of the roller conveyor 22 before the glass plate 18 is transferred
25 thereon is located at the highest position (A).

When the bend-shaped glass plate 18 is transferred onto the air-cooling/tempering roller conveyor 22, the

air-cooling/tempering roller conveyor 22 transfers the glass plate 18 into the air-cooling/tempering device 16 while the rollers 22A, 22B, ... are moved vertically so as to maintain the shape of the glass plate 18 (B). When the entirety of the glass plate 18 is transferred into the air-cooling/tempering device 16, air is blown to the roller conveyor 22 through the air-blowing heads 24A-24J, 26A-26J of the whole areas (C).

As the transfer of the glass plate 18 proceeds, the air-blowing heads 24A-24J, 26A-26J stop the blowing of air in the order of areas through which the glass plate 18 is passed (D). Then, another glass plate 18A to be air-cooled and tempered next is transferred with a predetermined interval into the air-cooling/tempering device 16 (E). When the entirety of the glass plate 18A is transferred into the air-cooling/tempering device 16, the air-blowing heads 24A-24E, 26A-26E in the whole areas blow air again to thereby start the air-cooling and tempering of the glass plate 18A (F).

In the same manner as the above, as the transfer of the glass plate 18A proceeds, the air-blowing heads 24A-24J, 26A-26J stop the blowing of air in the order of the areas through which the glass plate 18A is passed, and another glass plate 18B to be air-cooled and tempered next is transferred with a predetermined interval into the air-cooling/tempering device 16.

Thus, by stopping the blowing of air in the order of

the areas through which the glass plate 18 is passed, the glass plate 18A to be air-cooled and tempered next can be transferred into the air-cooling/tempering device 16 while the air-cooling and tempering of the glass plate 18 transferred already into the air-cooling/tempering device 16 is conducted. Accordingly, the intervals of subsequently transferred glass plates 18 can be shortened whereby the glass plates 18 can be air-cooled and tempered effectively.

10 Figure 11 is a diagram showing the function of a third embodiment of the air-cooling/tempering method of the present invention in which the above-mentioned air-cooling/tempering device 16 is used. In the description of the function of the third embodiment, characters in
15 brackets correspond to characters in brackets in Figure 11.

Each of the rollers 22A, 22B, ... of the roller conveyor 22 before the glass plate 18 is transferred thereon is located at the highest position (A).

20 When the bend-shaped glass plate 18 is transferred on the air-cooling/tempering roller conveyor 22, the air-cooling/tempering roller conveyor 22 transfers the glass plate 18 into the air-cooling/tempering device 16 while the rollers 22A, 22B, ... are moved vertically so as to
25 maintain the shape of the glass plate 18 (B). When the entirety of the glass plate 18 is transferred into the air-cooling/tempering device 16, air is blown to the

roller conveyor 22 through the air-blowing heads 24A-24E, 26A-26E in the area corresponding to the position of the glass plate 18 ((C), (D)).

As described before, air is blown from only the area
5 where the glass plate 18 is located, and air is not blown from the other areas. Accordingly, air is not blown from the areas before and after the position where the glass plate 18 is located. To the area to which air is not blown, another glass plate 18A to be air-cooled and
10 tempered next is transferred with a predetermined interval (E). When the entirety of the glass plate 18A is transferred into the air-cooling/tempering device 16, air is blown to the roller conveyor 22 through the air-blowing heads 24A-24E, 26A-26E of the area corresponding
15 to the position where the glass plate 18 is located, whereby the air-cooling and tempering of the glass plate 18A is started (F).

Thus, by blowing air from only the area where the glass plate 18 is located, the glass plate 18A to be air-
20 cooled and tempered next can be transferred into the air-cooling/tempering device 16 in the process of air-cooling and tempering of the glass plate 18 transferred already in the air-cooling/tempering device 16. With this, intervals of subsequently transferred glass plates 18 can
25 be shortened whereby the glass plates 18 can effectively be air-cooled and tempered.

As described above, according to the air-

cooling/tempering method of the above-mentioned
embodiments, the intervals of subsequently transferred
glass plates 18 can be shortened whereby the glass plates
18 can effectively be air-cooled and tempered. The air-
5 cooled and tempered glass plates 18 are transferred from
the air-cooling/tempering roller conveyor 22 to the
delivering roller conveyor 28 to be transferred to an
inspection device (not shown) at the next step.

In the embodiment shown in Figure 1, the shaping
10 zone 14 is formed in the hood of the heating furnace 12.
Specifically, the shaping zone 14 is formed in the
heating furnace 12 at a downstream side of the heating
furnace 12. In the bend-shaping apparatus for a glass
plate in the present invention, (i) the shaping zone may
15 be formed in the heating furnace or (ii) it may be formed
out of the heating furnace or (iii) a part of the shaping
zone may be formed out of the heating furnace. The
location of the shaping zone can properly be selected
among the above-mentioned (i)-(iii) depending on
20 dimensions and a curved shape of the glass plate.

First, the relation of a position of the shaping
zone to a thickness of a glass plate will be described.
A tempering treatment after the glass plate has been
bend-shaped is influenced by a thickness of the glass
25 plate. Namely, a compression stress is produced in the
surfaces of the glass plate and a tensile stress is
produced in the inside thereof after the tempering

treatment. These residual stresses are derived from a temperature difference between the surfaces of the glass plate and the inside of the glass plate, which is resulted from the rapidly cooling of heating glass plate.

5 Since it is difficult to cause such temperature difference in a case of a glass plate having a smaller thickness, it is necessary to increase cooling performance at the time of rapidly cooling when a glass plate having a smaller thickness is to be tempered. As
10 one of measures to increase the cooling performance, there is a way of increasing a blowing pressure or an air quantity of cooling air. Alternatively, there is a way of increasing a temperature of glass plate at the time of rapidly cooling.

15 In the case of (i), a glass plate after having been bend-shaped can immediately be transferred into the air-cooling/tempering device because the glass plate can be bend-shaped in the heating furnace. Accordingly, the glass plate can be transferred into the air-
20 cooling/tempering device without causing a reduction of the temperature of the glass plate. Accordingly, the arrangement of the shaping zone in (i) is advantageous when the glass plate having a smaller thickness is bend-shaped and tempered.

25 Next, the relation of the position of the shaping zone to a curved shape of the glass plate will be described. In bend-shaping a glass plate into a shape

curved in plural directions (a complexly curved shape), means for bend-shaping the glass plate in a direction perpendicular to the transferring direction is provided in the shaping zone. If such means is provided in the heating furnace, it is difficult to maintain a closed space in the heating furnace whereby there occurs the disadvantage that temperature in the heating furnace can not be maintained to a predetermined value. In view of this, a stabilized temperature in the heating furnace can be realized by providing such means outside the heating furnace. Accordingly, the arrangement of the shaping zone in (ii) is advantageous in a case of bend-shaping the glass plate to have a complexly curved shape.

Further, for bend-shaping/tempering processing for bend-shaping a glass plate having a smaller thickness to have a complexly curved shape, (iii) is advantageous as a compromise of (i) and (ii). The arrangement of the bend-shaping zone of (iii) is preferable not only in merely the viewpoint of the compromise but also in the following point. Namely, for a demand of small quantity·large variety of products in automobile industries, there is a need for bend-shaping glass plates of many models with a single glass plate bend-shaping apparatus. There are a variety of glass plates of different thickness depending on models. Accordingly, it is advantageous if glass plates having a variety of thickness and a variety of curved shape can be formed with a single glass plate

bend-shaping apparatus. The arrangement of the shaping zone applicable to such demand of small quantity and variety of products is the arrangement of (iii).

As a bend-shaping method or apparatus prior to air-cooling and tempering a glass plate, various one can be used in the present invention regardless of whether or not they have been known or unknown. For example, there is a method or an apparatus wherein a lower peripheral surface of a heated glass plate is supported by a ring, and the glass plate is held between a shaping mold disposed at an upper surface side of the glass plate and such ring to be bend-shaped. Further, there is such bend-shaping methods or apparatus as explained in the above-mentioned embodiments. In either method or apparatus, the glass plate is transferred into the air-cooling/tempering device by the roller conveyor after the glass plate has been bend-shaped. In particular, the bend-shaped methods or apparatus as explained in the above-mentioned embodiments are preferable by the reasons as described below.

Namely, as already described, it is preferable that the glass plate is bend-shaped in a direction along the transferring direction from the viewpoint of strain resulted in the glass plate. As a method for bend-shaping in the direction along the transferring direction, there is the '326 method. In this method, however, the glass late is transferred in a vertical direction with

respect to a horizontal plane. Accordingly, the entire equipment becomes large. Further, since the glass plate is transferred against gravity, it is difficult to transfer the glass plate at a high speed, and it is necessary to provide, in particular, means for preventing the glass plate from slipping on the rollers. Further, it is necessary that the transferring direction of the glass plate, which has been subjected to bend-shaping and air-cooling/tempering, has to be changed from a vertical direction to a horizontal direction. Means for changing the transferring direction are complicated and there is fear of occurrence of a flaw in the glass plate.

On the other hand, according to the bend-shaping methods and apparatus explained on the above-mentioned embodiments, glass plates of different model can be shaped by changing only vertical movement control data on the rollers. Further, the transferring direction of the glass plate is horizontal, and accordingly, the occurrence of a flaw in the glass plate can be suppressed. Thus, the bend-shaping methods and apparatus explained on the above-mentioned embodiments are bend-shaping methods and apparatus having a simple structure as a whole in the equipment, which can bend-shape the glass plate in a direction along the transferring direction. Accordingly, as the bend-shaping methods and apparatus for a glass plate, used prior to the air-cooling and tempering of the glass plate in the present invention, the examples

described in the above-mentioned embodiments are preferable.

Since the bend-shaping methods and apparatus for a glass plate described in the above-mentioned embodiments are preferred, it is preferable in the present invention to constitute the transferring means for transferring the glass plate into the air-cooling/tempering device with a plurality of rollers which cause a vertical movement in a vertical direction depending on a position of the glass plate transferred. Hereinbelow, the reason why preferable will be described in more detail.

In the case of transferring a glass plate by rollers, a so-called roller strain is resulted by the contact of the glass plate with the rollers. Each of the rollers extends in a direction perpendicular to the transferring direction, and is arranged adjacently in the transferring direction. Therefore, the roller strain is resulted in a stripe form in a direction perpendicular to the transferring direction.

Usually, it is difficult to find such roller strain by human eyes, and is never hindered due to the roller strain in use. However, the roller strain is seldom found depending on states of use and light incident into the glass plate. For example, when a glass plate is assembled to an automobile, a stripe-like strain extending in a vertical direction of the glass plate in the assembled state is apt to be visible in comparison

with a stripe-like strain extending in a horizontal direction in the assembled state. Accordingly, it is preferable to make the transferring direction of the glass plate to be bend-shaped coincident with a horizontal direction in the assembled state.

On the other hand, when a glass plate is bend-shaped along the transferring direction, the thickness in apparent of the glass plate viewed from a direction of the frontage of the air-cooling/tempering device becomes large. Accordingly, it is necessary to keep the frontage to be large in conventional air-cooling/tempering devices for a glass plate. A large frontage will increase the distance between the air-blowing ports of the air-cooling/tempering device and the glass plate surface to thereby reduce the cooling performance.

In comparison with this, the above-mentioned embodiments are advantageous in the following point that the glass plate is transferred by the roller conveyor capable of moving vertically, and the air-blowing heads are moved vertically with the vertical movement of the roller conveyor. Namely, the air-cooling/tempering device according to the preferred embodiment can change the vertical position of the frontage depending on a curved shape of the glass plate. In this case, the frontage of the air-cooling/tempering device for transferring the glass plate can be small, and the distance between the air-blowing heads and the glass

plate surfaces can be reduced to a predetermined short value. Accordingly, the air-cooling/tempering of the glass plate can be realized without reducing the cooling performance in consideration of the occurrence of a strain in the glass plate.

The each bend-shaping roller itself and each air-cooling/tempering roller itself are moved vertically in a vertical direction with the transfer of the glass plate. By such vertical movements, a curved plane is formed by the plurality of rollers at positions where the glass plate is transferred, and the curved plane is shifted in the transferring direction of the glass plate. In other words, the curved plane corresponds to a wave-like plane; each roller corresponds to an oscillating element of a wave, and a stroke in the vertical movement of each roller corresponds to an amplitude respectively. Then, by providing a phase difference in a vertical movement of each roller so that the phase of each roller is subsequently changed to a downstream side in the transferring direction, the curved plane is shifted in the transferring direction of the glass plate as if a wave is propagated.

Thus, by moving vertically the plurality of rollers depending on a position of the glass plate transferred, the transferring plane formed by the plurality of rollers is curved, and the glass plate is transferred along the curved transferring plane. Accordingly, the present

invention can omit work for exchanging rollers, which was required in conventional techniques, because the glass plate can be bend-shaped and air-cooled/tempered without using a plurality of rollers having different curvatures for treating different models. Further, since glass plates of different model can be shaped by changing only the vertical movement control data for the rollers, a job change time can substantially be eliminated.

In the vertical movement of the rollers, the transferring speed of a horizontal component of the glass plate relies on a position in a vertical direction of the rollers. When an angular speed of each of the rollers is constant, the transferring speed of a horizontal component of a roller at a lower side is higher than that of a roller at an upper side. Such an imbalance of speed will cause slippage between the rollers and the glass plate thereby resulting a defect such as damaging the glass plate. In view of this, it is preferable to provide a rotating/driving means for rotating the plurality of rollers independent from each other and to control the rotating/driving means by a control device so that the transferring speed of a horizontal component of the glass plate is equal. With such, the above-mentioned disadvantage can be eliminated and a glass plate free from a flaw is obtainable.

A desired curved plane formed by each of air-cooling/tempering rollers means a curved plane which

corresponds to a curved shape of a glass plate bend-shaped in the transferring direction of the glass plate.

A desired curved plane formed by each of the bend-shaping rollers is a curved plane required according to a position of the glass plate transferred on the shaping rollers. Specifically, at the most downstream side position in the glass plate bend-shaping zone, the curved plane formed by the rollers at this position exhibits a curved shape which is substantially in coincidence with a curved shape of the glass plate finally formed in the transferring direction of the glass plate.

As an example, a curved plane formed by each of the shaping rollers positioned at an upstream side with respect to the most downstream side position has a larger radius of curvature than the curved plane formed by each of the shaping rollers at the most downstream side position. Toward an upstream side, a curved plane formed by each of the shaping rollers at a further upstream side has a further larger radius of curvature.

As another example, at any position in the glass plate bend-shaping zone, it is possible to form a curved plane, formed by each of the shaping rollers, to be a curved shape which is substantially in coincidence with a finally obtainable curved shape of the glass plate in the transferring direction. In any case, for bend-shaping the glass plate into a finally obtainable curved shape, a curved plane formed by each of the shaping rollers is a

curved plane determined depending on a position where the glass plate is transferred. In this case, the curved shape is determined in consideration of the thickness of the glass plate and the temperature of the glass plate.

- 5 It is preferred to construct the device so as to be able to determine appropriately as to how to change the shape of the curved plane (or as to fix a predetermined curved shape) depending on these conditions.

The glass plate does not often bend by its own weight instantaneously. Accordingly, it is desirable, from the viewpoint of transmitting sufficiently the transferring/driving force of each of the shaping rollers, that the radius of curvature of a curved plane formed by each of the shaping rollers is rendered to be a radius of curvature which is gradually reduced from the upstream side, and is rendered, at the most downstream side position, to be a finally obtainable curve shape of the glass plate.

INDUSTRIAL APPLICABILITY

- 20 As described above, since the air-cooling/tempering device for a glass plate of the present invention has the upper air-blowing heads and the lower air-blowing heads moved vertically in connection with the vertical movement of the rollers of the roller conveyor, uniform cooling performance can always be presented.

Further, according to the air-cooling/tempering device for a glass plate of the present invention wherein

glass plates are transferred by the roller conveyor capable of moving vertically and the air-blowing heads are moved vertically with the vertical movement of the roller conveyor, the position of the frontage in a vertical direction can be changed according to a curved shape of the glass plate. In this case, since the frontage for transferring the glass plate into the air-cooling/tempering device can be small, the distance between the air-blowing heads and the surfaces of the glass plate can be shortened to be a predetermined value. Accordingly, the air-cooling and tempering of the glass plate in consideration of a strain resulted in the glass plate can be realized without reducing the cooling performance.

Further, according to the present invention, intervals of transferring glass plates can be shortened and the glass plates effectively be air-cooled and tempered.

CLAIMS:

1. An air-cooling/tempering device for a glass plate which comprises:

5 a plurality of rollers for transferring a bend-shaped glass plate and for curving a transferring plane so as to correspond to a curved shape of the glass plate by being moved vertically;

10 a plurality of upper air-blowing heads each disposed at an upper side between each adjacent rollers to blow air to an upper face of the glass plate transferred by the plurality of rollers;

15 a plurality of lower air-blowing heads each disposed at a lower side between each adjacent rollers to blow air to a lower face of the glass plate transferred by the plurality of rollers; and

20 an air-blowing head moving mechanism for moving vertically the upper air-blowing heads and the lower air-blowing heads depending on a vertical position of the plurality of rollers in a state that the distance between an upper air-blowing head and the lower air-blowing head opposing the upper air-blowing head is kept to be constant.

25 2. The air-cooling/tempering device for a glass plate according to Claim 1, wherein the air-blowing head moving mechanism moves vertically the upper air-blowing heads and the lower air-blowing heads depending on an amount of movement in a height direction of an intermediate point

between adjacent rollers.

3. An air-cooling/tempering device for a glass plate which comprises:

a plurality of rollers disposed at predetermined intervals and supported by movable frames capable of moving vertically so as to move individually in a vertical direction to transfer a bend-shaped glass plate;

upper air-blowing heads each disposed at an upper side between each adjacent rollers to blow air to an upper face of the glass plate;

lower air-blowing heads each disposed at a lower side between each adjacent rollers to blow air to a lower face of the glass plate;

a plurality of upper supporting frames attached with the upper air-blowing heads and supported to be capable of sliding in a vertical direction;

a plurality of lower supporting frames attached with the lower air-blowing heads and supported to be capable of sliding in a vertical direction;

pivot shafts each provided on each of the movable frames;

disk-like pieces each provided on the same axis as the pivot shaft;

swing arms each disposed between adjacent pivot shafts so that an end is supported rotatably by a pivot shaft at one side and the other end is supported by the pivot shaft at the other side;

connecting arms each having an end connected to one of the lower supporting frames and the end connected to a central portion of one of the swing arms;

and driven arms each having an end connected to one
5 of the upper supporting frames and the other end mounted on an upper face of a central portion of one of the swing arms, wherein the plurality of rollers at a position where the glass plate is transferred are moved vertically with the transfer of the glass plate so that a curved
10 plane is formed in the transferring plane formed by the plurality of rollers at that position, the curved plane being curved in a transferring direction so as to correspond to the shape of the glass plate bend-shaped; each of the rollers are sequentially moved vertically
15 with the transfer of the glass plate and the curved plane is shifted in the transferring direction of the glass plate with the transfer of the glass plate; and the upper air-blowing heads and the lower air-blowing heads each disposed between each adjacent rollers are moved
20 vertically so as to correspond to the vertical movement of the glass plate to transfer the bend-shaped glass plate and at the same time, to blow air to the upper and lower faces of the glass plate to thereby air-cooling and tempering the glass plate.

25 4. The air-cooling/tempering device for a glass plate according to Claim 3, which further comprises upper supporting frame driving means each adapted to move

vertically each of the upper supporting frames and lower supporting frame driving means each adapted to move vertically each of the lower supporting frames wherein each of the connecting arms is connected to adjacent lower supporting frames via the lower supporting frame driving means.

5. The air-cooling/tempering device for a glass plate according to Claim 1, 2, 3 or 4, wherein at an upstream side of the air-cooling/tempering device, there is located a glass plate bend-shaping apparatus for bend-shaping a glass plate to have a predetermined curvature, which comprises a heating furnace for heating the glass plate to a bend-shaping temperature, a roller conveyor provided at a downstream side of the heating furnace and having a plurality of shaping rollers for forming a transferring plane for transferring the glass plate, vertically moving means for moving in a vertical direction the plurality of shaping rollers and a control means for controlling the driving means so that by the plurality of rollers at the position where the glass plate is transferred, a desired curved plane curved in the transferring direction of the glass plate is formed in at least a portion of the transferring plane and the plurality of rollers are sequentially moved vertically with the transfer of the glass plate whereby the curved plane is shifted in the transferring direction of the glass plate.

6. An air-cooling/tempering method for a glass plate for air-cooling and tempering the glass plate by blowing air to an upper face and a lower face of the glass plate transferred sequentially by means of a transferring means through air-blowing heads disposed along the transferring means, which comprises:

using the air-blowing heads in which the air-blowing area is divided into a plurality of areas along a transferring direction of the transferring means;

a step of stopping the blowing of air in the air-blowing area at an uppermost stream side in the transferring direction from the beginning of the transfer of a portion of the glass plate into the air-blowing area at an uppermost stream side in the transferring direction in the air-blowing head to the transfer of the entirety of the glass plate;

a step of blowing air in the air-blowing area at the uppermost stream side in the transferring direction from the transfer of the entirety of the glass plate into the air-blowing area at the uppermost stream side in the transferring direction to the transfer of the glass plate to a downstream side of the air-blowing area at the uppermost stream side in the transferring direction; and a step of stopping the blowing of air in the air-blowing area at the uppermost stream side in the transferring direction after the entirety of the glass plate has been transferred from the air-blowing area at the uppermost

stream side in the transferring direction.

7. The air-cooling/tempering method according to Claim 6, wherein the air-blowing head has an air-blowing area which is divided into a first area at an upper stream side in the transferring direction of the transferring means and a second area at a downstream side thereof, and wherein a step of blowing air in the first and second areas when the entirety of the glass plate is transferred into the first area, a step of stopping the blowing of air in the first area when the entirety of the glass plate is passed through the first area and a step of reopening the blowing of air in the first area when the next glass plate is transferred into the first area to which the blowing of air has been stopped, are repeated sequentially.

8. The air-cooling/tempering method according to Claim 6, wherein the air-blowing head has an air-blowing area which is divided into a plurality of areas along the transferring direction of the transferring means, and wherein a step of blowing air from all divided areas when the entirety of the glass plate is transferred into the air-blowing area of the air-blowing head, a step of stopping the blowing of air in the order of areas through which the glass plate is passed, a step of reopening the blowing of air from the all divided areas when the entirety of the next glass plate is transferred into the areas to which the blowing of air is stopped, and a step

of stopping the blowing of air in the order of areas through which the glass plate is passed, are repeated sequentially.

9. The air-cooling/tempering method according to Claim 5 6, wherein an air-blowing area in the air-blowing heads is divided into a plurality of areas along the transferring direction of the transferring means, and air is blown from only the air-blowing area of the area which corresponds to the position of the glass plate during the 10 transfer when the entirety of the glass plate is transferred into the air-blowing area of the air-blowing head.

10. The air-cooling/tempering method according to Claim 6, wherein a plurality of tempering rollers are used as 15 the transferring means; the plurality of tempering rollers at the position where the glass plate is transferred are moved vertically with the transfer of the glass plate so that a curved plane is formed in at least a portion of the transferring plane formed by the rollers 20 at that position, the curved plane being in correspondence with a curved shape of the glass plate in the transferring direction of the glass plate; the plurality of tempering rollers are sequentially moved vertically with the transfer of the glass plate so that 25 the curved plane is shifted in the transferring direction of the glass plate with the transfer of the glass plate, and a plurality of air-blowing heads in the air-blowing

head each disposed between adjacent tempering rollers is moved vertically so as to correspond to the vertical movement of each of the tempering rollers, whereby the glass plate is air-cooled and tempered.

ABSTRACT

An air-cooling/tempering device for a glass plate capable of providing uniform cooling performance and an air-cooling/tempering method for a glass plate capable of
5 air-cooling and tempering efficiently are presented.

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2000 年 12 月 28 日 (28.12.2000)


PCT

(10) 国際公開番号
WO 00/78685 A1

- (51) 国際特許分類: C03B 27/044 (NEMUGAKI, Yohichi) [JP/JP]. 富岡昌紀 (TOMIOKA, Masanori) [JP/JP]. 野村 謙 (NOMURA, Ken) [JP/JP]; 〒470-2514 愛知県知多郡武豊町字旭1番地 旭硝子株式会社内 Aichi (JP).
- (21) 国際出願番号: PCT/JP00/03967
- (22) 国際出願日: 2000 年 6 月 16 日 (16.06.2000)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願平11/171140 1999 年 6 月 17 日 (17.06.1999) JP
特願平11/171143 1999 年 6 月 17 日 (17.06.1999) JP
- (74) 代理人: 弁理士 泉名謙治, 外 (SENMYO, Kenji et al.); 〒101-0042 東京都千代田区神田東松下町38番地 鳥本鋼業ビル Tokyo (JP).
- (81) 指定国 (国内): BR, CN, CZ, MX, US.
- (84) 指定国 (広域): ヨーロッパ特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (71) 出願人 (米国を除く全ての指定国について): 旭硝子株式会社 (ASAHI GLASS COMPANY, LIMITED) [JP/JP]; 〒100-8405 東京都千代田区有楽町一丁目12番1号 Tokyo (JP).
- 添付公開書類:
— 国際調査報告書
- (72) 発明者: および
- (75) 発明者/出願人 (米国についてのみ): 合歡垣洋一
- 2 文字コード及び他の略語については、定期発行される各 PCT ガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

(54) Title: DEVICE AND METHOD FOR AIR-COOLED REINFORCING OF GLASS SHEET

(54) 発明の名称: ガラス板の風冷強化装置および風冷強化方法

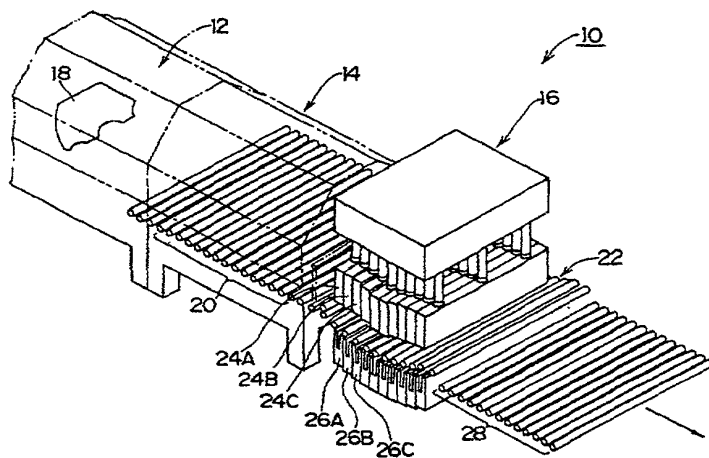

(57) Abstract: A device for air-cooled reinforcing of glass sheet, capable of giving a uniform cooling capacity; and a method for air-cooled reinforcing of glass sheet, capable of efficient air-cooled reinforcing of glass sheet.

[続葉有]

WO 00/78685 A1

1/11

Fig. 1

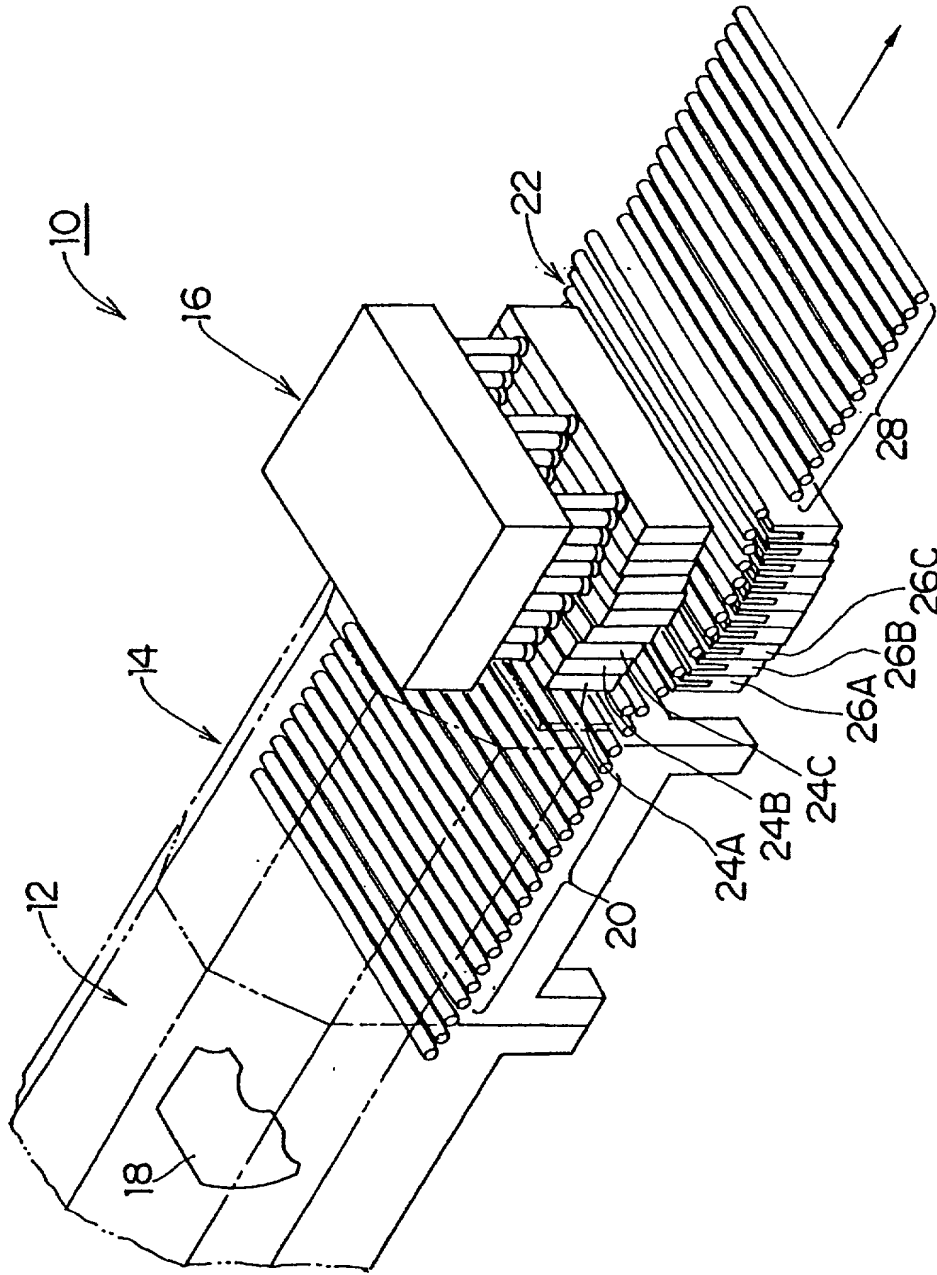


Fig. 2

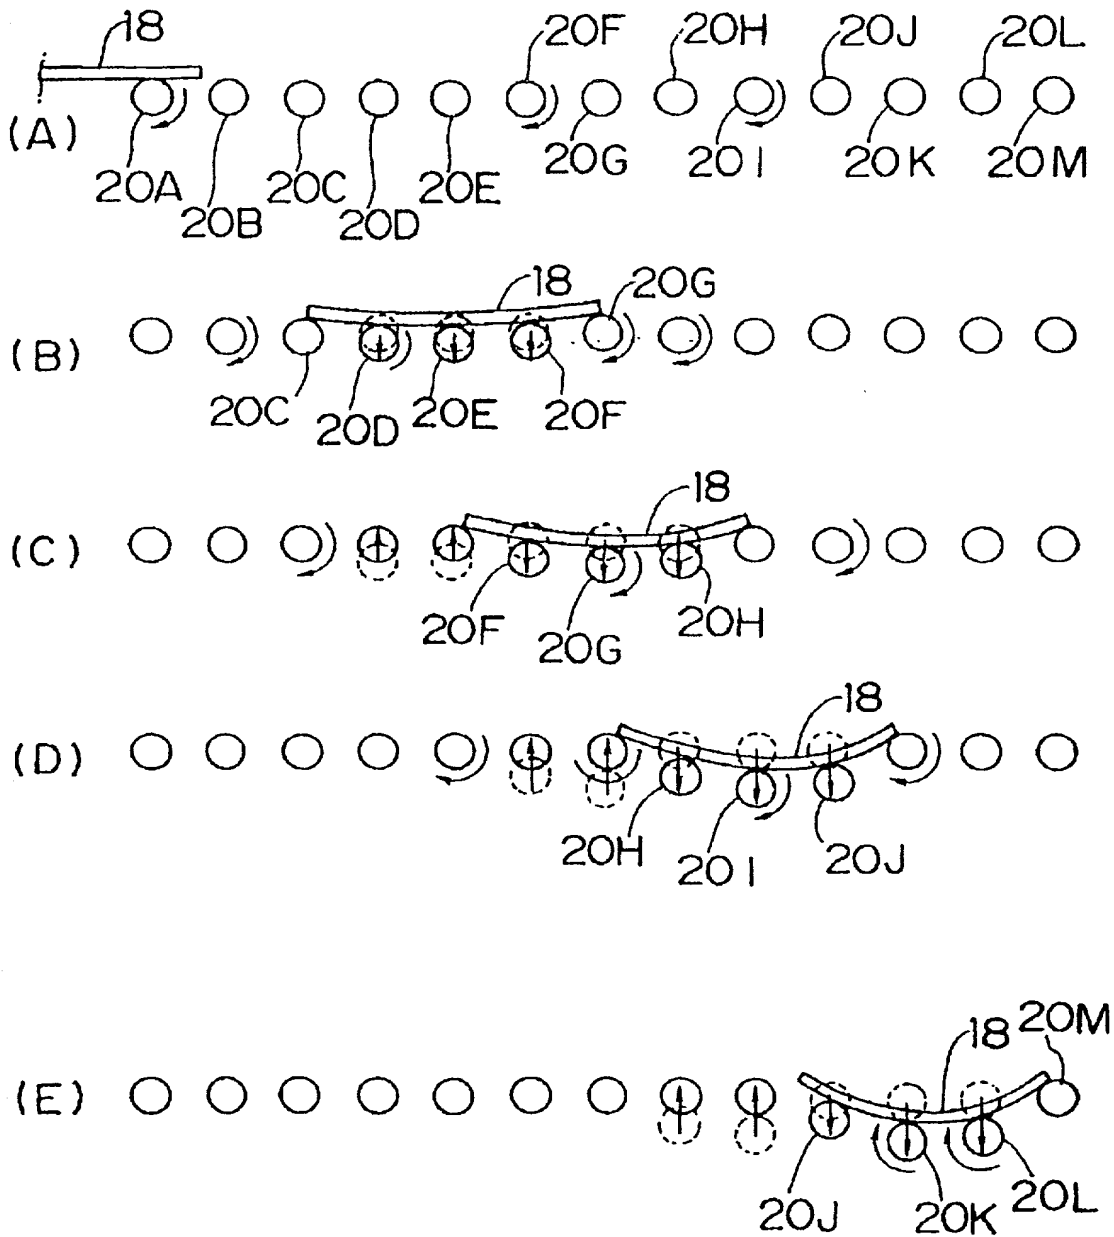


Fig. 3

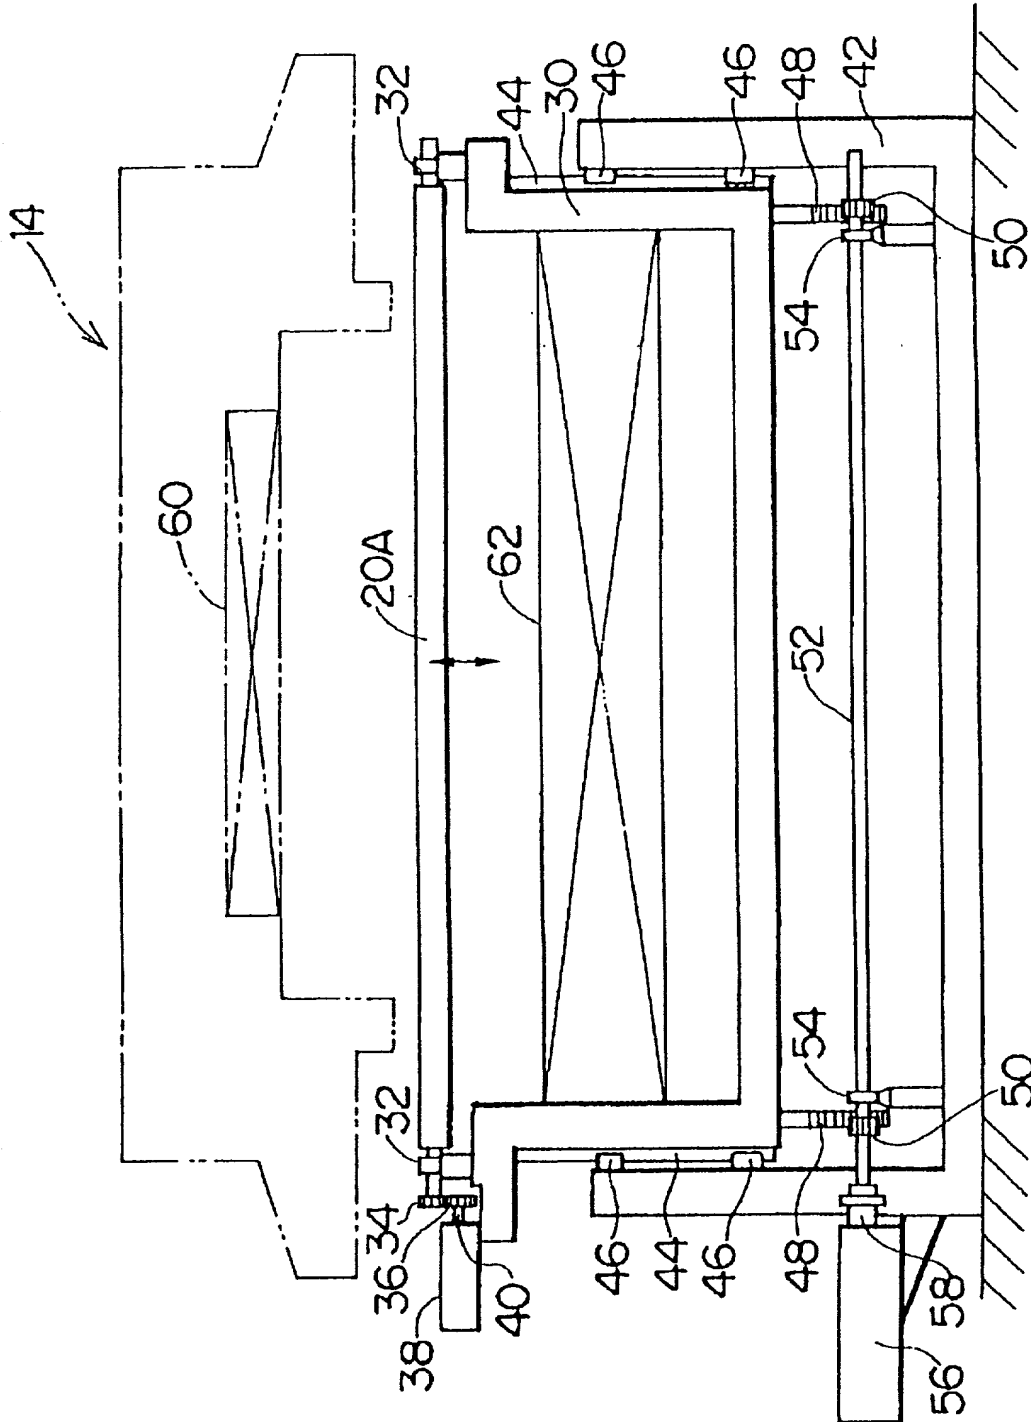


Fig. 4

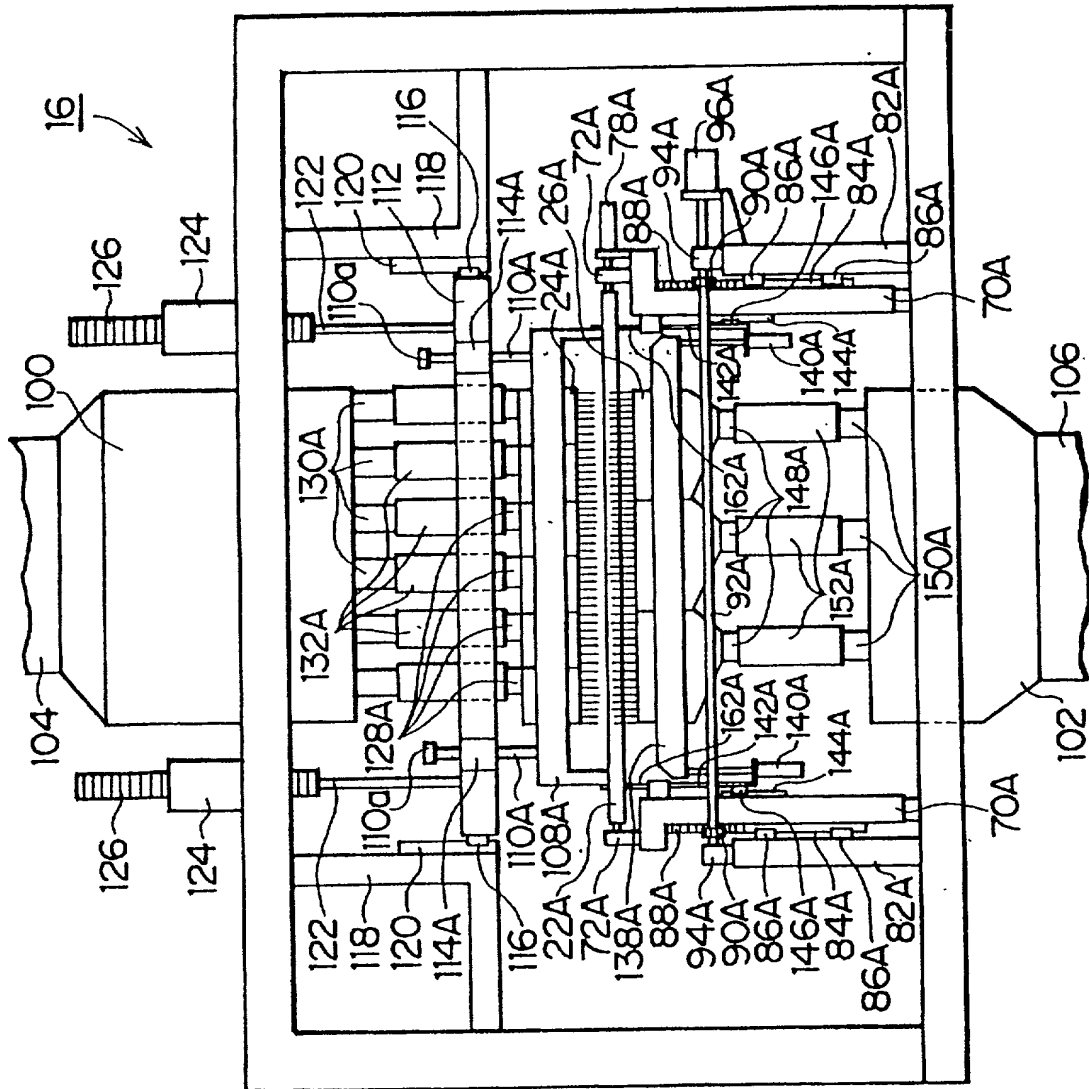


Fig. 5

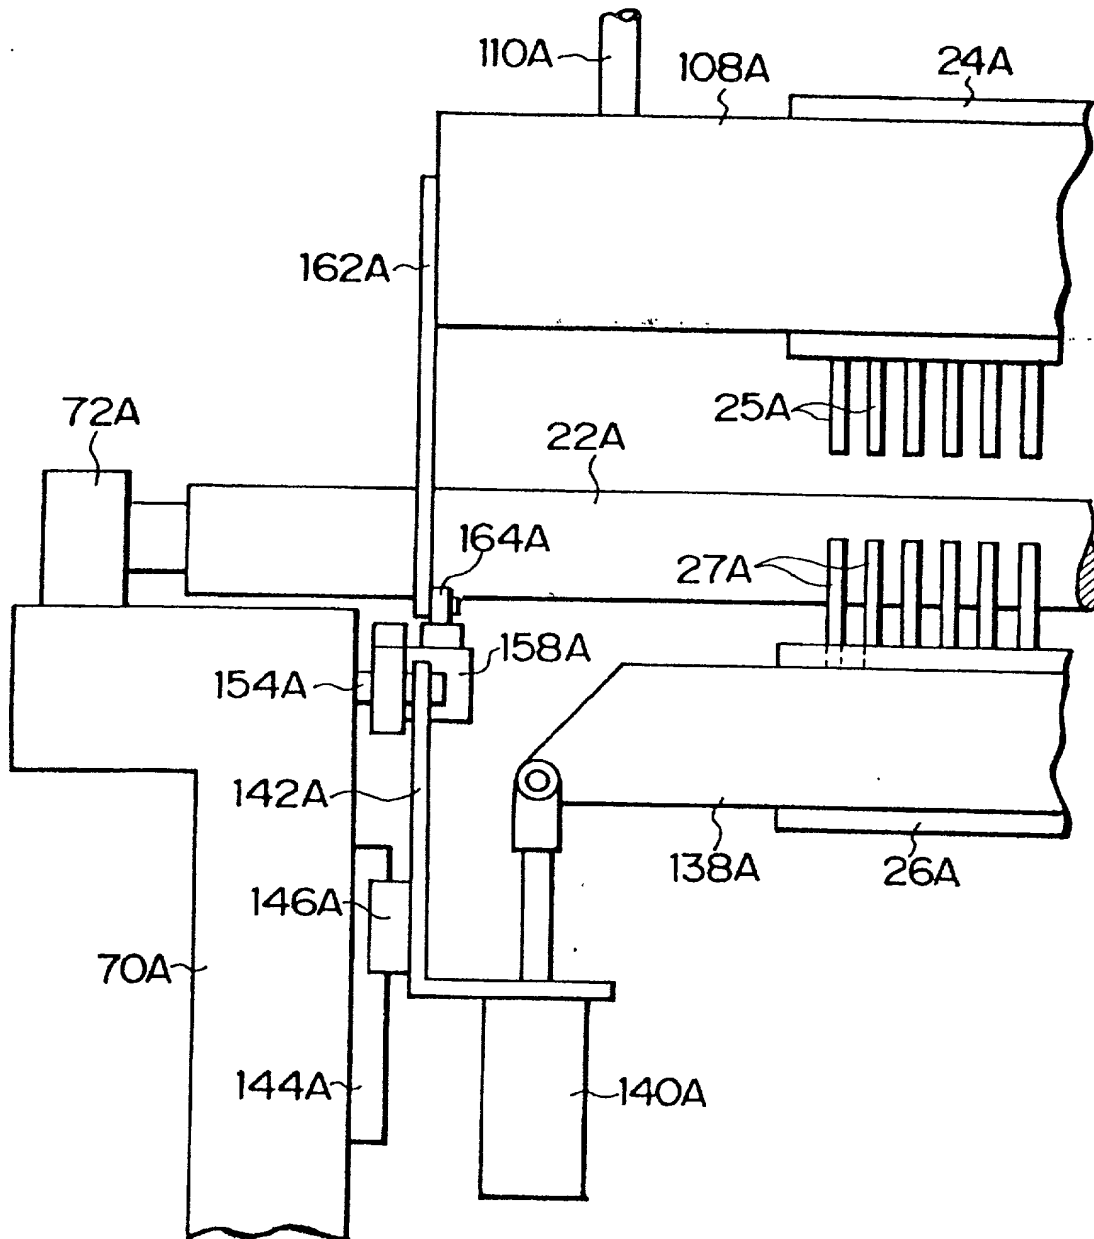


Fig. 6

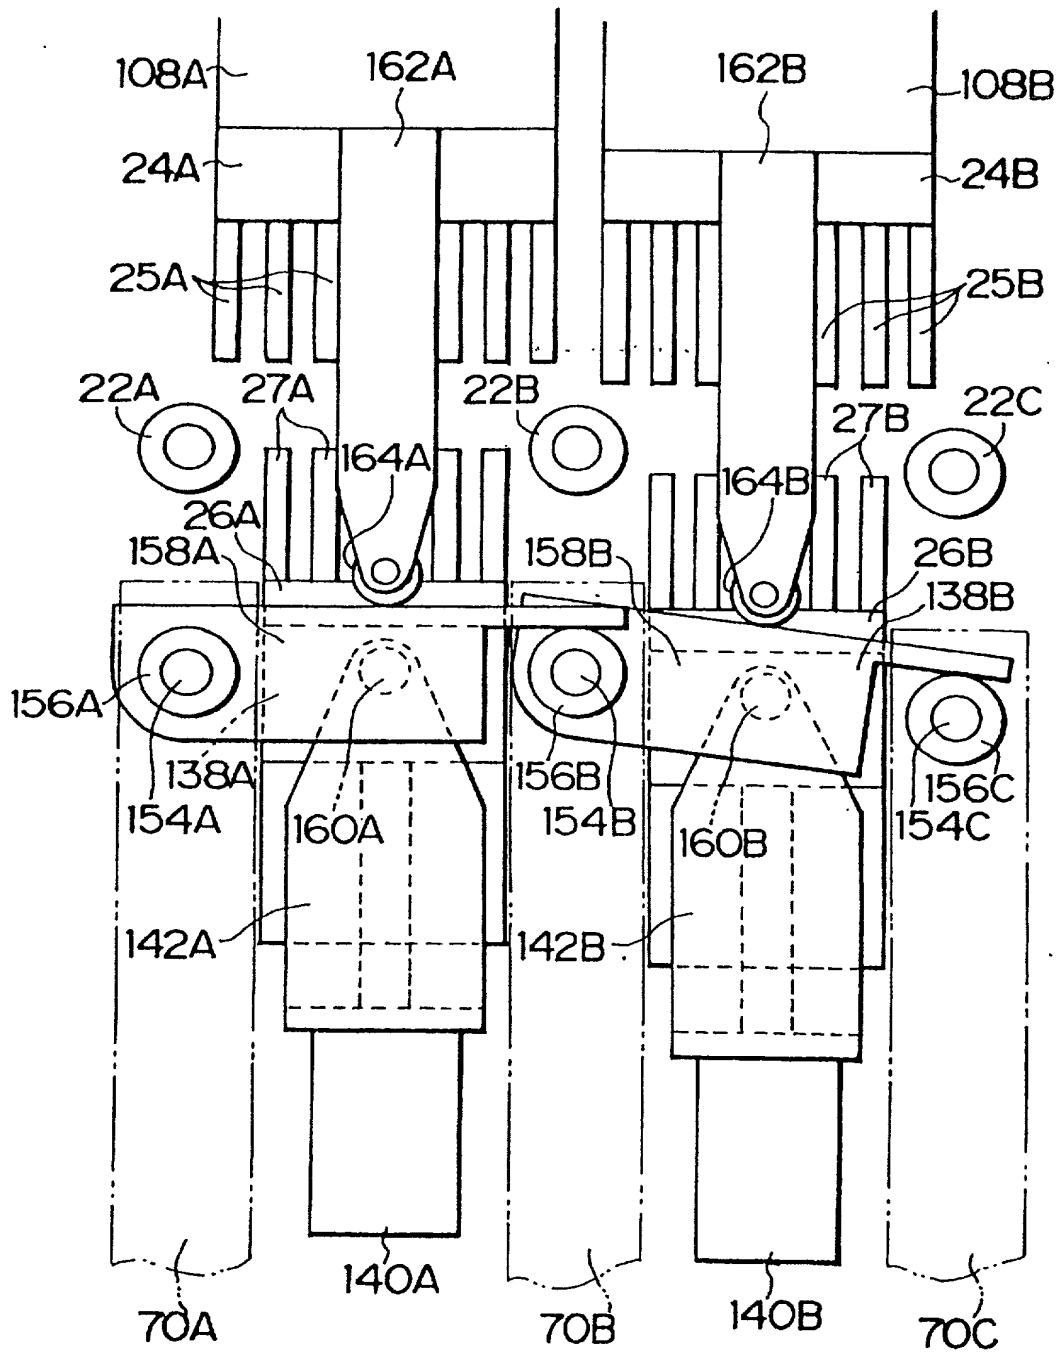


Fig. 7

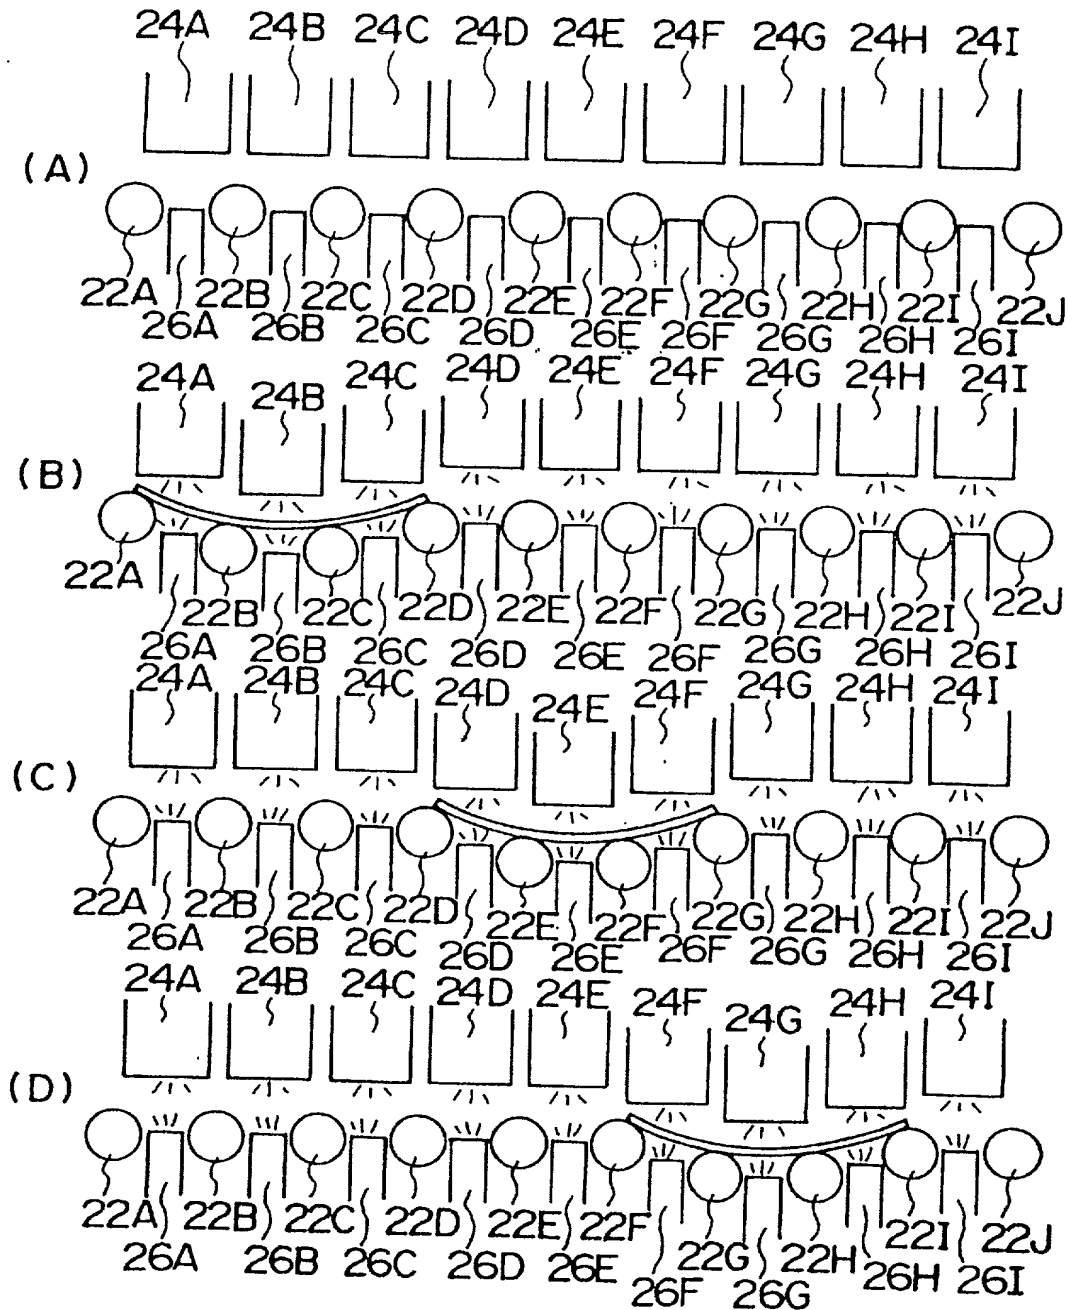


Fig. 8

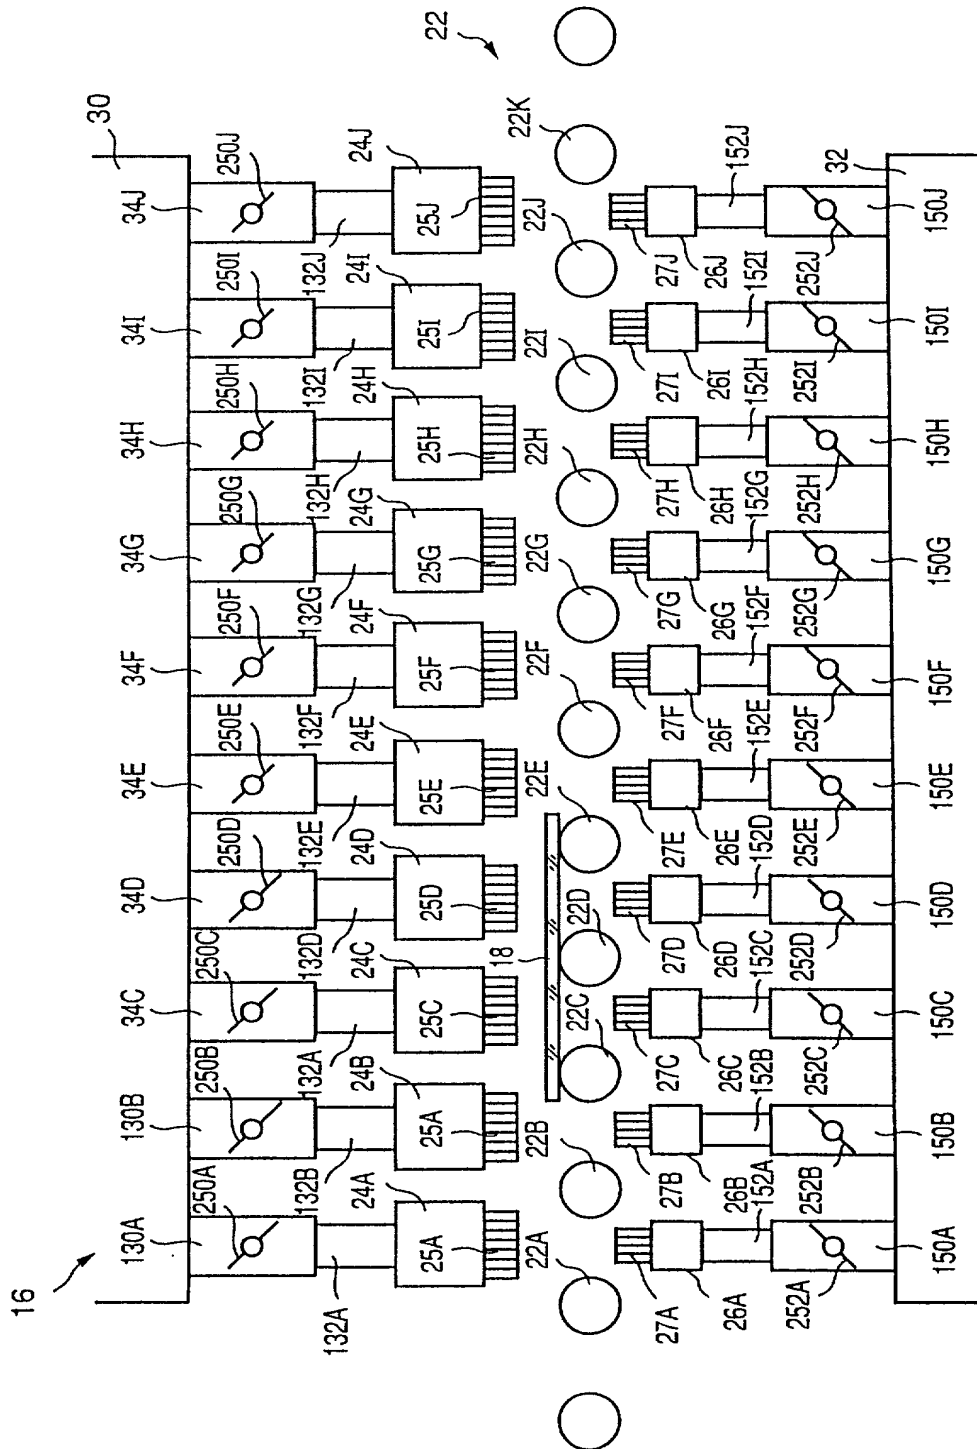


Fig. 9

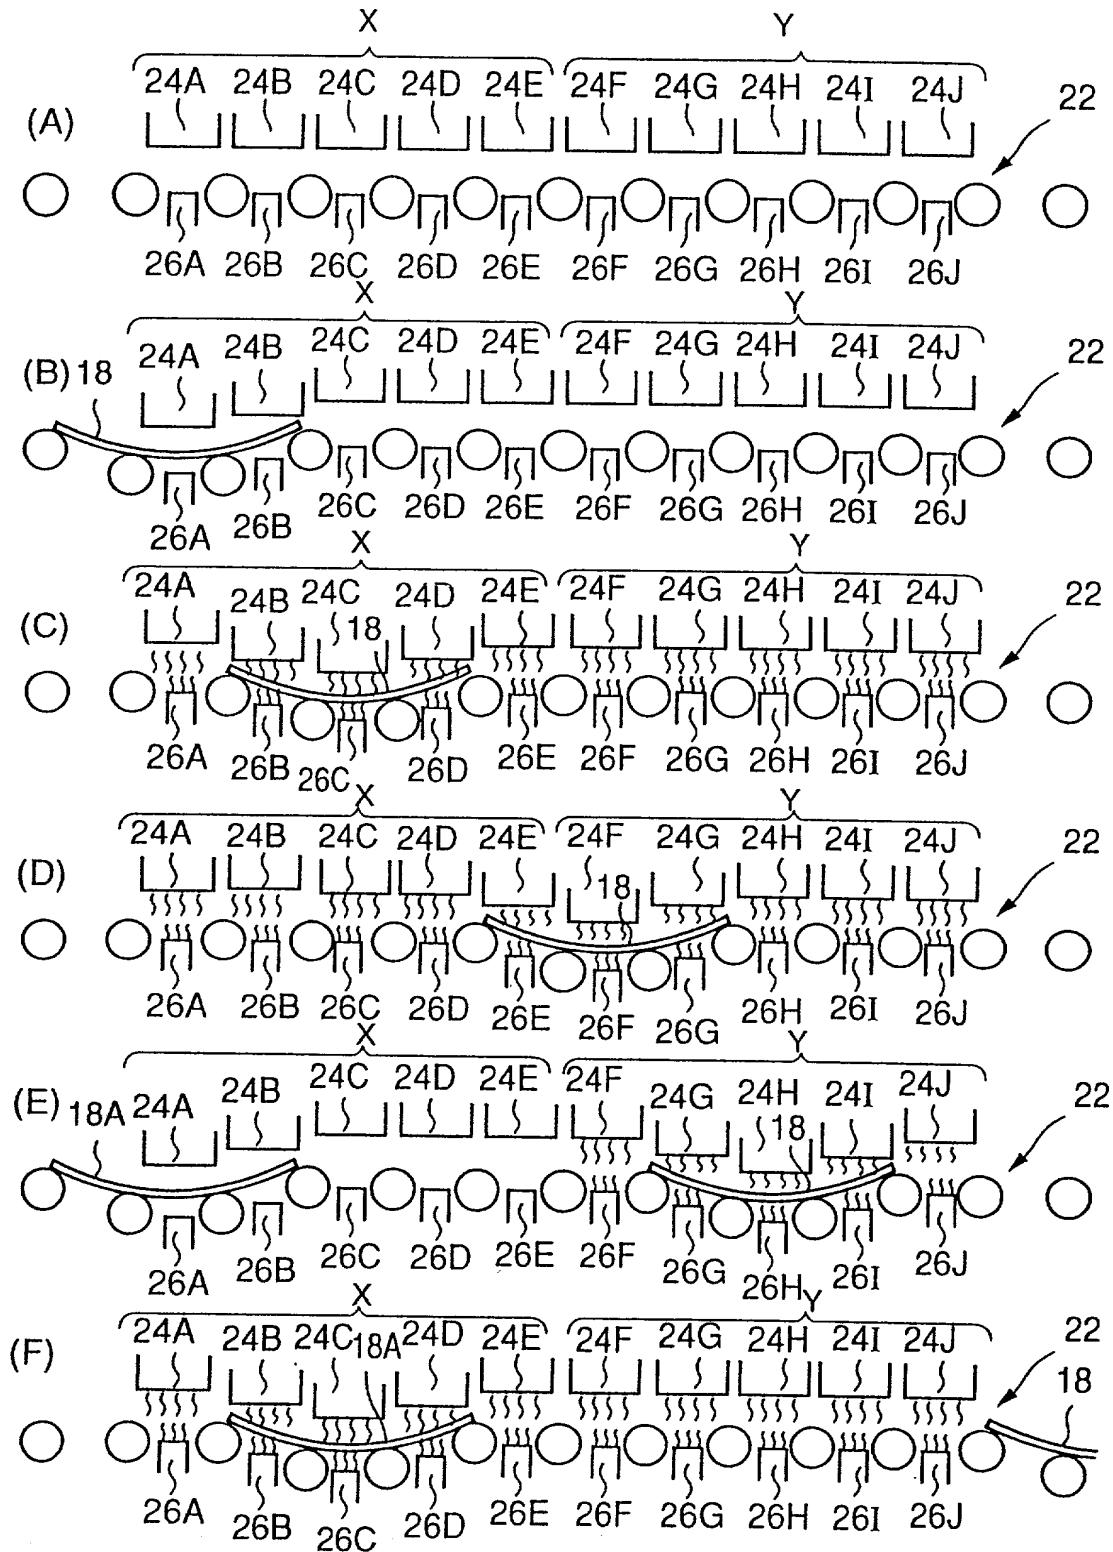


Fig. 10


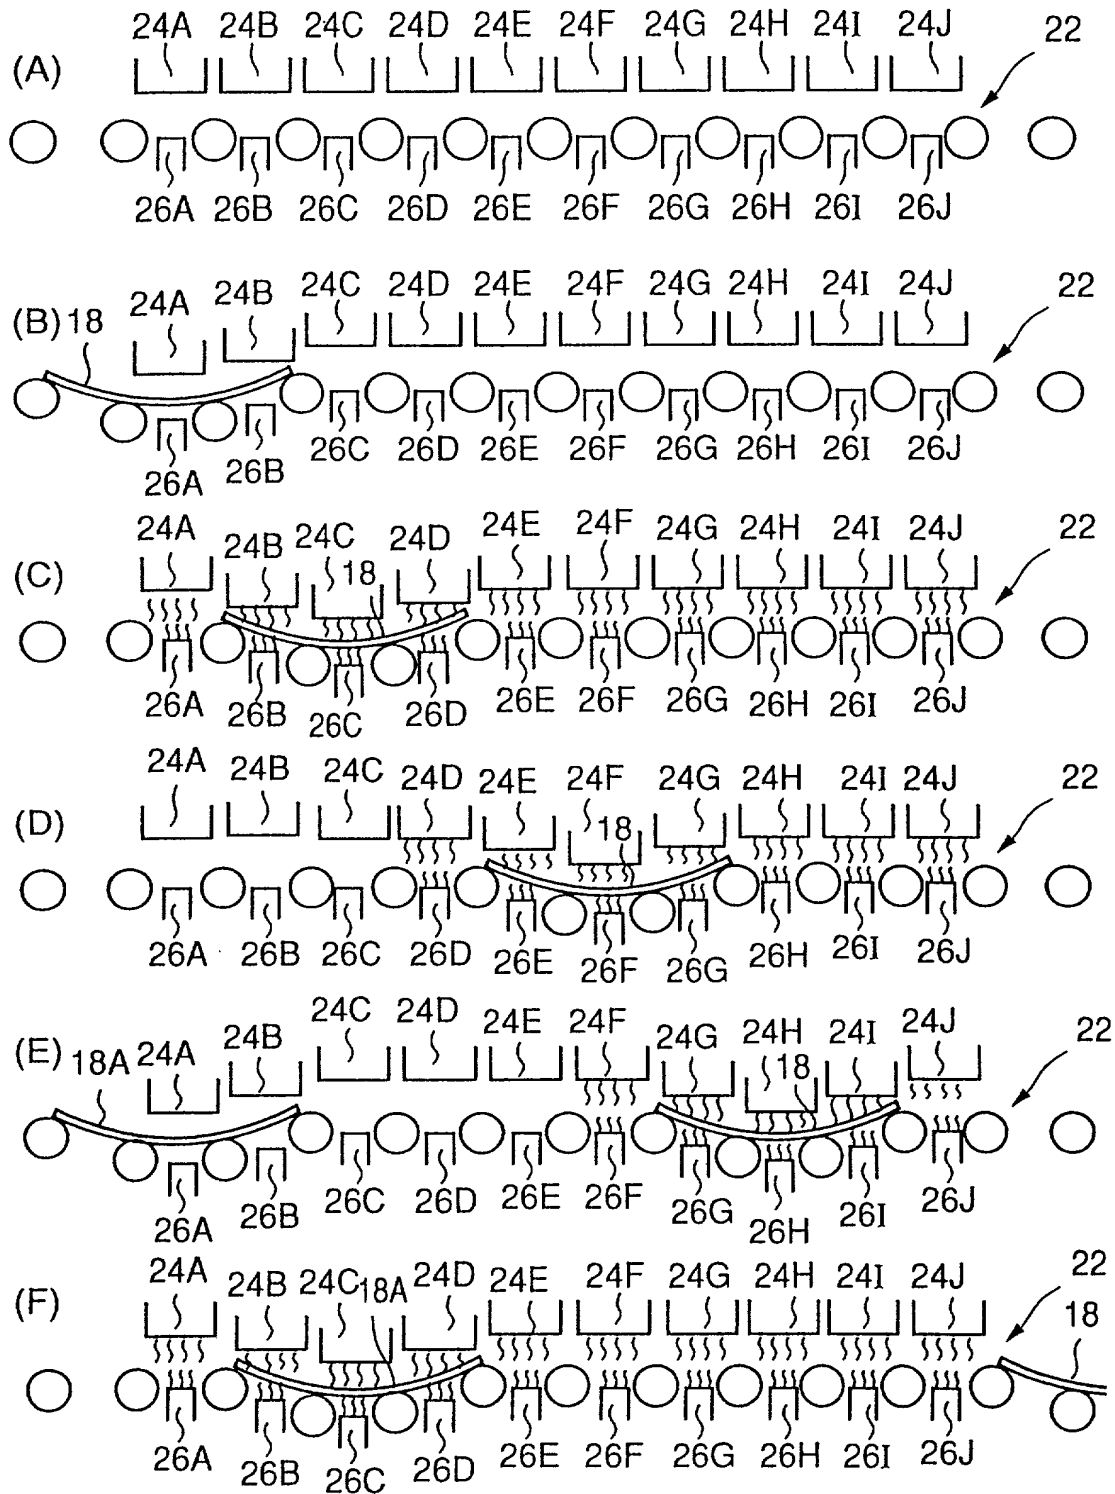


Fig. 11

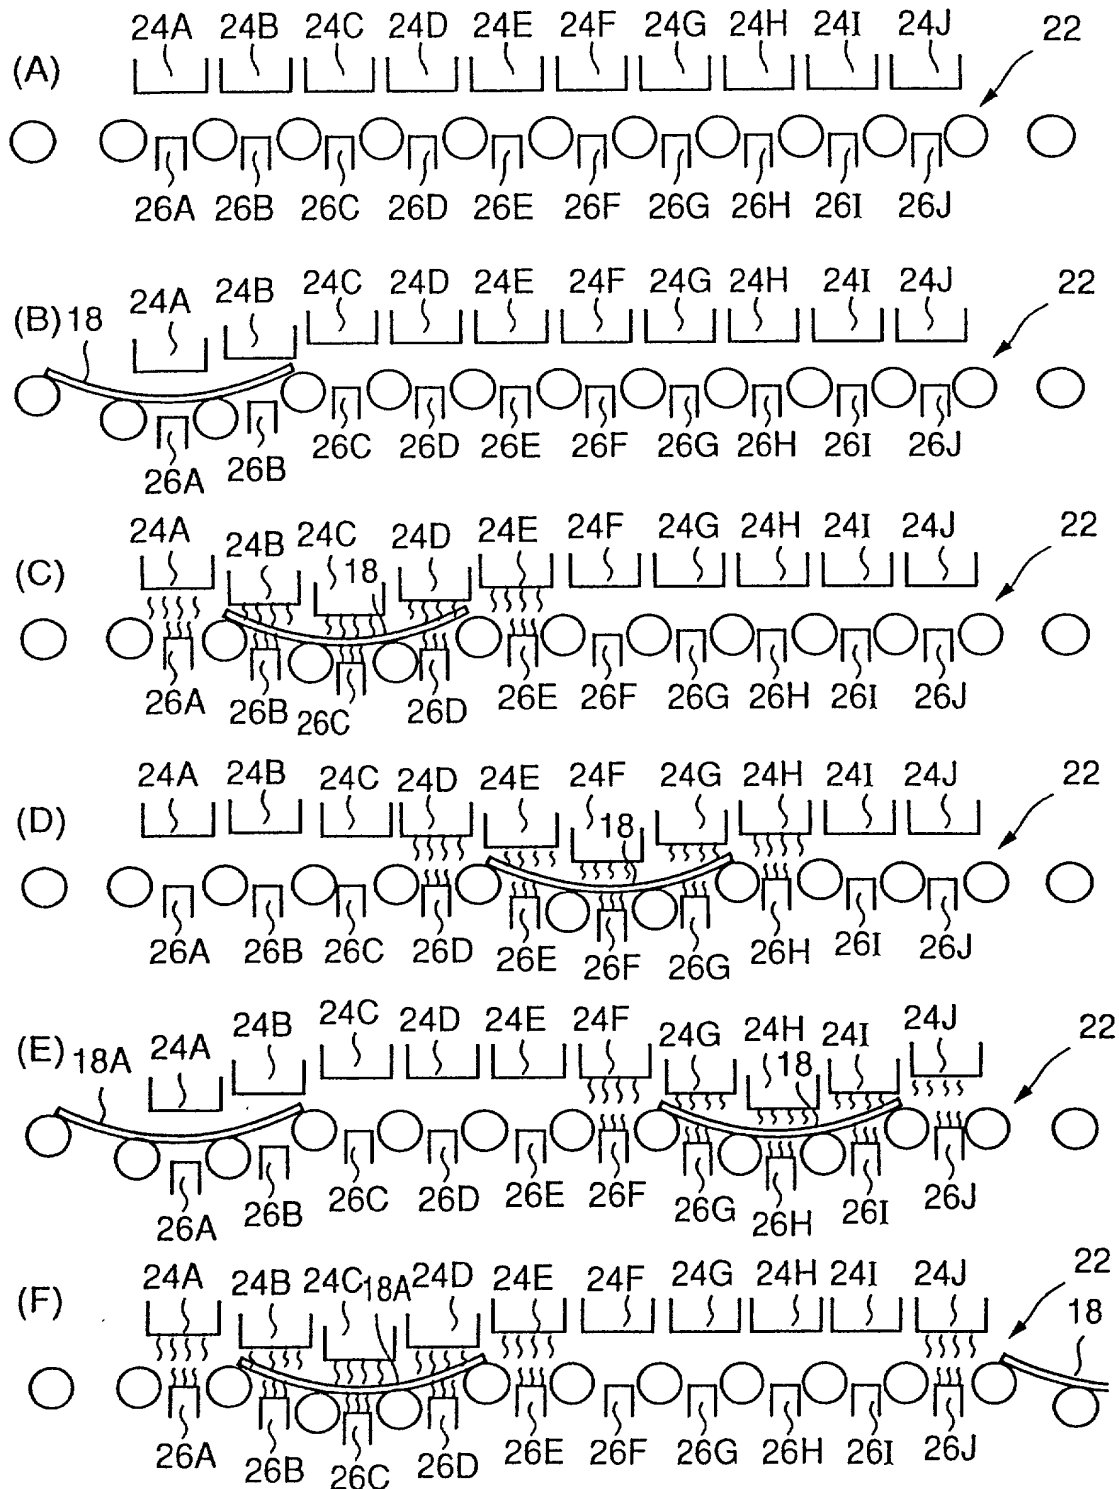

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

AIR-COOLING/TEMPERING DEVICE AND
AIR-COOLING/TEMPERING METHOD FOR
A GLASS PLATE

上記発明の明細書は、

the specification of which

- ☐ 本書に添付されています。
☐ ____月____日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
(該当する場合) ____に訂正されました。

☐ is attached hereto.

☒ was filed on June 16, 2000
as United States Application Number or
PCT International Application Number
PCT/JP00/03967 and was amended on
____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条 (a) - (d) 項又は365条 (b) 項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-171140

(Number)
(番号)

Japan

(Country)
(国名)

11-171143

(Number)
(番号)

Japan

(Country)
(国名)

私は、第35編米国法典119条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

PCT/JP00/03967

(Application No.)
(出願番号)

16/June/2000

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自信の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed

優先権主張

17/June/1999

(Day/Month/Year Filed)
(出願年月日)

☒

☐

Yes

No

はい

いいえ

17/June/1999

(Day/Month/Year Filed)
(出願年月日)

☒

☐

Yes

No

はい

いいえ

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

Pending

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration
(日本語宣言書)

委任状：私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。
(弁理士、または代理人の指名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Jean-Paul Lavalleye, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Richard L. Treanor, Reg. No. 36,379; Steven P. Weihrauch, Reg. No. 32,829; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305; Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Neifeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surinder Sachar, Reg. No. 34,423; Jeffrey B. McIntyre, Reg. No. 36,867; William T. Enos, Reg. No. 33,128; Michael E. McCabe, Jr., Reg. No. 37,182; Bradley D. Lytle, Reg. No. 40,073; and Michael R. Casey, Reg. No. 40,294, with full powers of substitution and revocation.

書類送付先

Send Correspondence to:

OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.
FOURTH FLOOR
1755 JEFFERSON DAVIS HIGHWAY
ARLINGTON, VIRGINIA 22202 U.S.A.

直接電話連絡先：(名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)
(703) 413-3000

単独発明者または第一の共同発明者の氏名	Full name of sole or first joint inventor
発明者の署名	Inventor's signature
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address
第二の共同発明者の氏名	Full name of second joint inventor, if any
第二の共同発明者の署名	Second joint inventor's signature
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

(第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Declaration

(日本語宣言書)

第三の共同発明者の氏名	日付	Full name of third joint inventor, if any Ken Nomura
第三の共同発明者の署名		Third joint Inventor's signature <i>Ken Nomura</i>
住所		Residence Aichi, Japan <i>Jp</i>
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o Asahi Glass Company, Limited 1, Aza-asahi, Taketoyo-cho, Chita-gun, AICHI 470-2514 JAPAN

第四の共同発明者の氏名	日付	Full name of fourth joint inventor, if any
第四の共同発明者の署名		Fourth joint Inventor's signature
住所		Residence
国籍		Citizenship
郵便の宛先		Post Office Address

第五の共同発明者の氏名	日付	Full name of fifth joint inventor, if any
第五の共同発明者の署名		Fifth joint Inventor's signature
住所		Residence
国籍		Citizenship
郵便の宛先		Post Office Address

第六の共同発明者の氏名	日付	Full name of sixth joint inventor, if any
第六の共同発明者の署名		Sixth joint Inventor's signature
住所		Residence
国籍		Citizenship
郵便の宛先		Post Office Address